

Future Light Source based on Energy Recovery Linac in Japan

H. Kawata¹, T. Kasuga¹, K. Satoh¹, R. Hajima², and N. Nakamura³

¹ERL Project Office, High Energy Accelerator Research Organization

²ERL Development Group, Japan Atomic Energy Agency

³The Institute for Solid State Physics, University of Tokyo

Outline

- 1) What is the requirement for the future light source?**
- 2) Scientific cases at the ERL**
- 3) ERL project team**
- 4) Present status of the R&D for the ERL project**
(Poster: A9 R. Hajima et al.)

What is the requirement for the future light source?

1) Specimen becomes smaller and smaller (nano-structure)

Focused beam size: μm \longrightarrow nm

2) Detailed information about electronic states

Higher Energy resolution

3) Structural analysis of non-crystalline materials

Coherent X-ray is essential!

4) Studies for non-equilibrium states


Short pulse (sub-pico second) is essential!

High brilliant light source
for general use

Coherence and short pulse
for cutting-edge science


It is important to realize both of them!

What kinds of accelerator are needed?

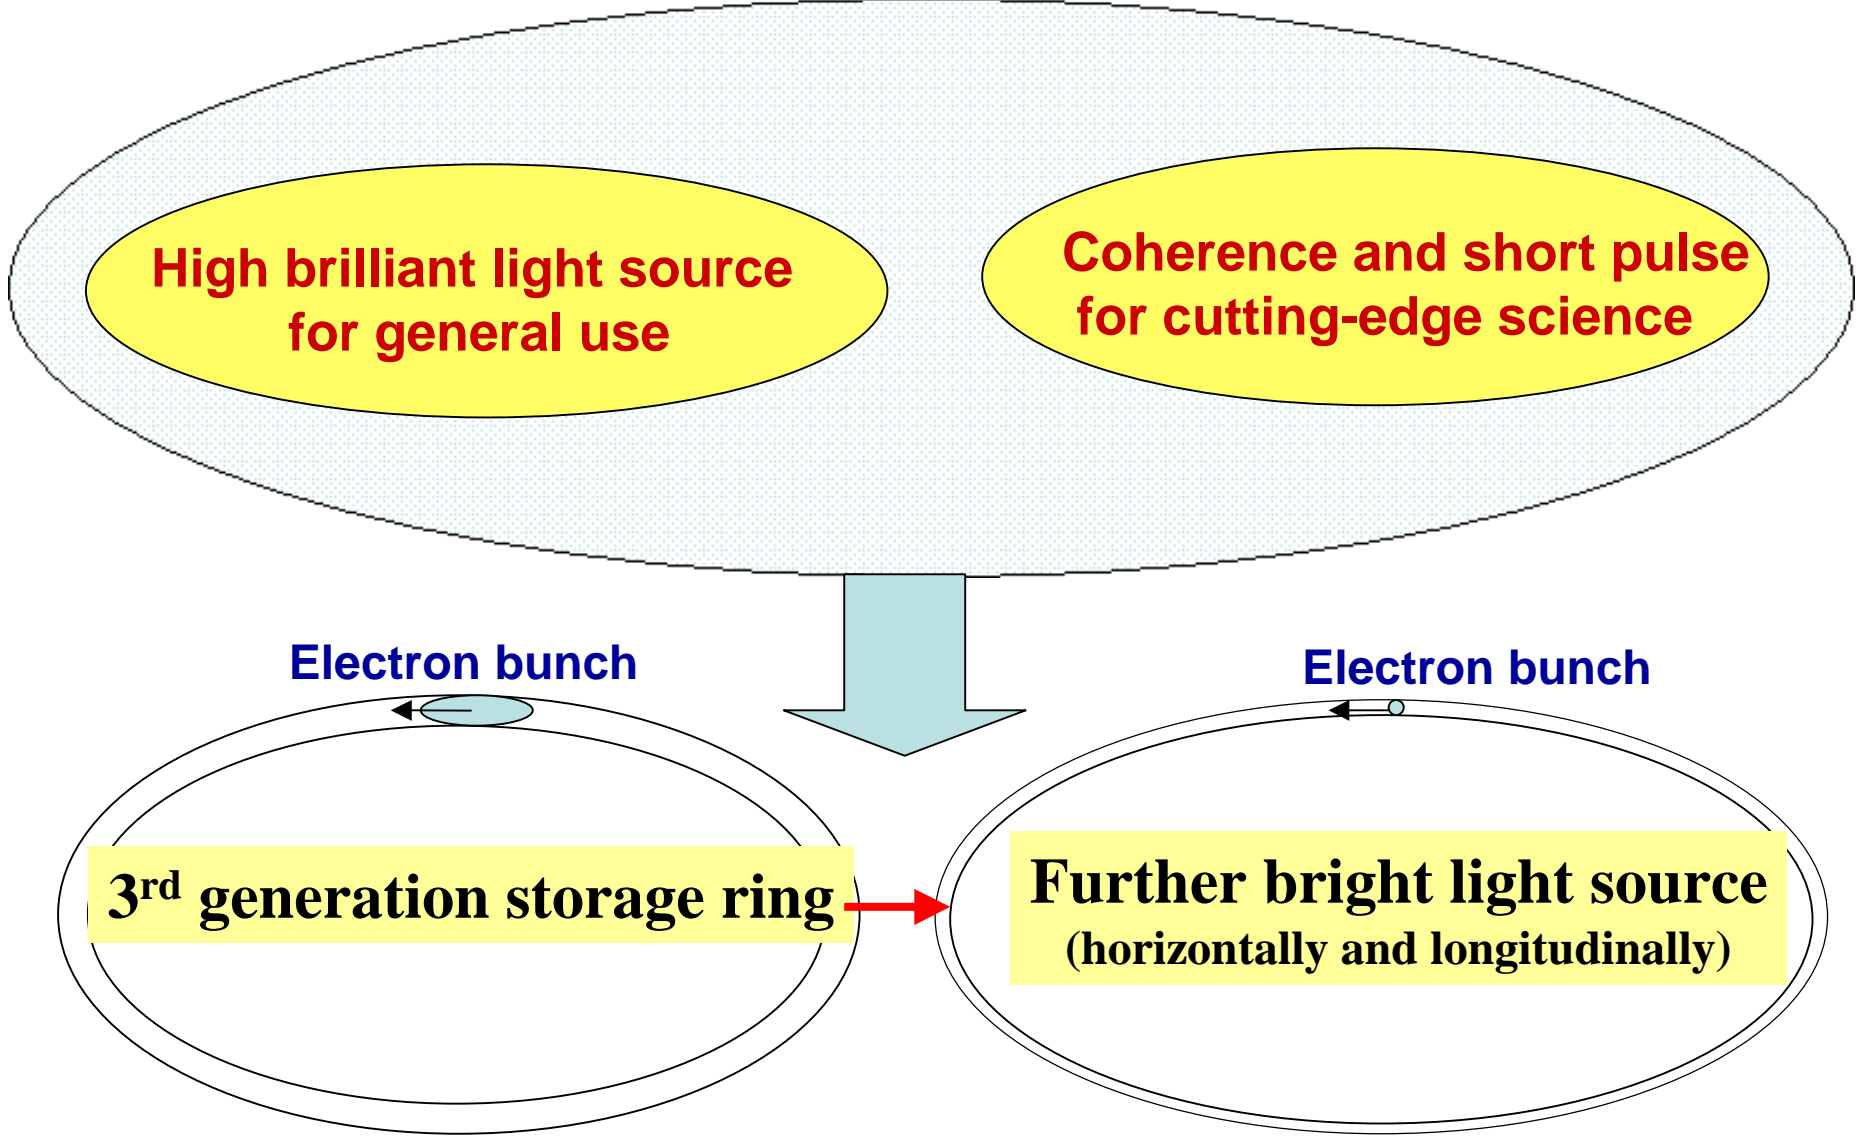

Specification of the synchrotron radiation from the future light source

Energy region : VUV-X (30eV-30keV)
Brilliance: 10^{21} - 10^{23}
 photons/sec/mrad²/mm²/0.1%B.W. @1~10 keV
Coherent fraction: 10~20% @ 10keV
 ↓
Emittance: 10pmrad ~ $\lambda/4\pi$ @ 10keV
Short pulse: ~100 fs
Number of ID beamlines: ~30 lines

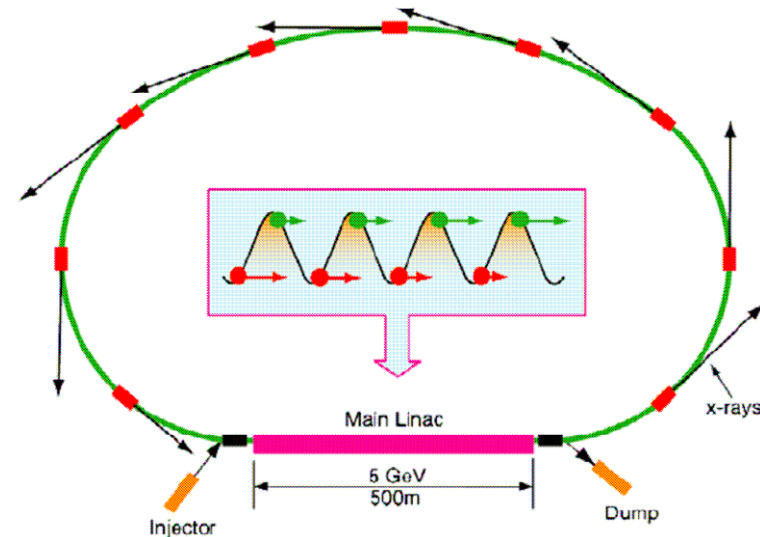

Energy Recovery Linac (ERL)

ERL is one of the most promising candidates


#) *Linac based light source:*

- 1) *Emittance can be improved by a factor of $1/\gamma$ from a natural emittance .*
- 2) *Short pulse of the order of 0.1~1 pico-second can be available.*

#) *A great numbers of ID-beamlines can be available.*

#) *ERL will not provide extremely high peak brilliance, but high averaged brilliance. This feature will be suitable to keep a character for the proving light source as an usual synchrotron radiation experiments.*

PF - ERL

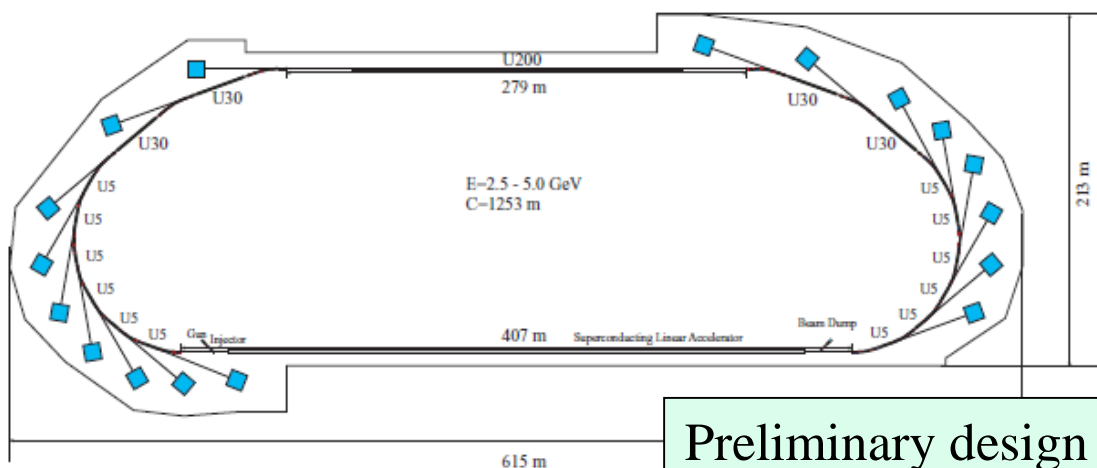


Preliminary design of PF-ERL at 2002



		PF-ERL undulator @ 5 GeV		SPRING-8 undulator @ 8 GeV	
Beam current		100 mA	100 mA	100 mA	100 mA
Undulator length		30 m	5 m	25 m	5 m
Source size (μm)	horizontal	37.8	18.2	892	892
	vertical	37.8	18.2	22.8	10.6
Source div. (μrad)	horizontal	4.1	9.8	37.4	38.4
	vertical	4.1	9.8	4.3	10
Beam size @ 50 m (μm)	horizontal	244	510	2761	2813
	vertical	244	510	236	509
Average brilliance(ph/s/0.1%/mm ² /mr ²)		6.0×10^{23}	7.6×10^{22}	2.2×10^{21}	5.0×10^{20}
% beam coherence		19	15	0.14	0.13

At the case of 8 keV photon energy

Size of 5-GeV class ERL

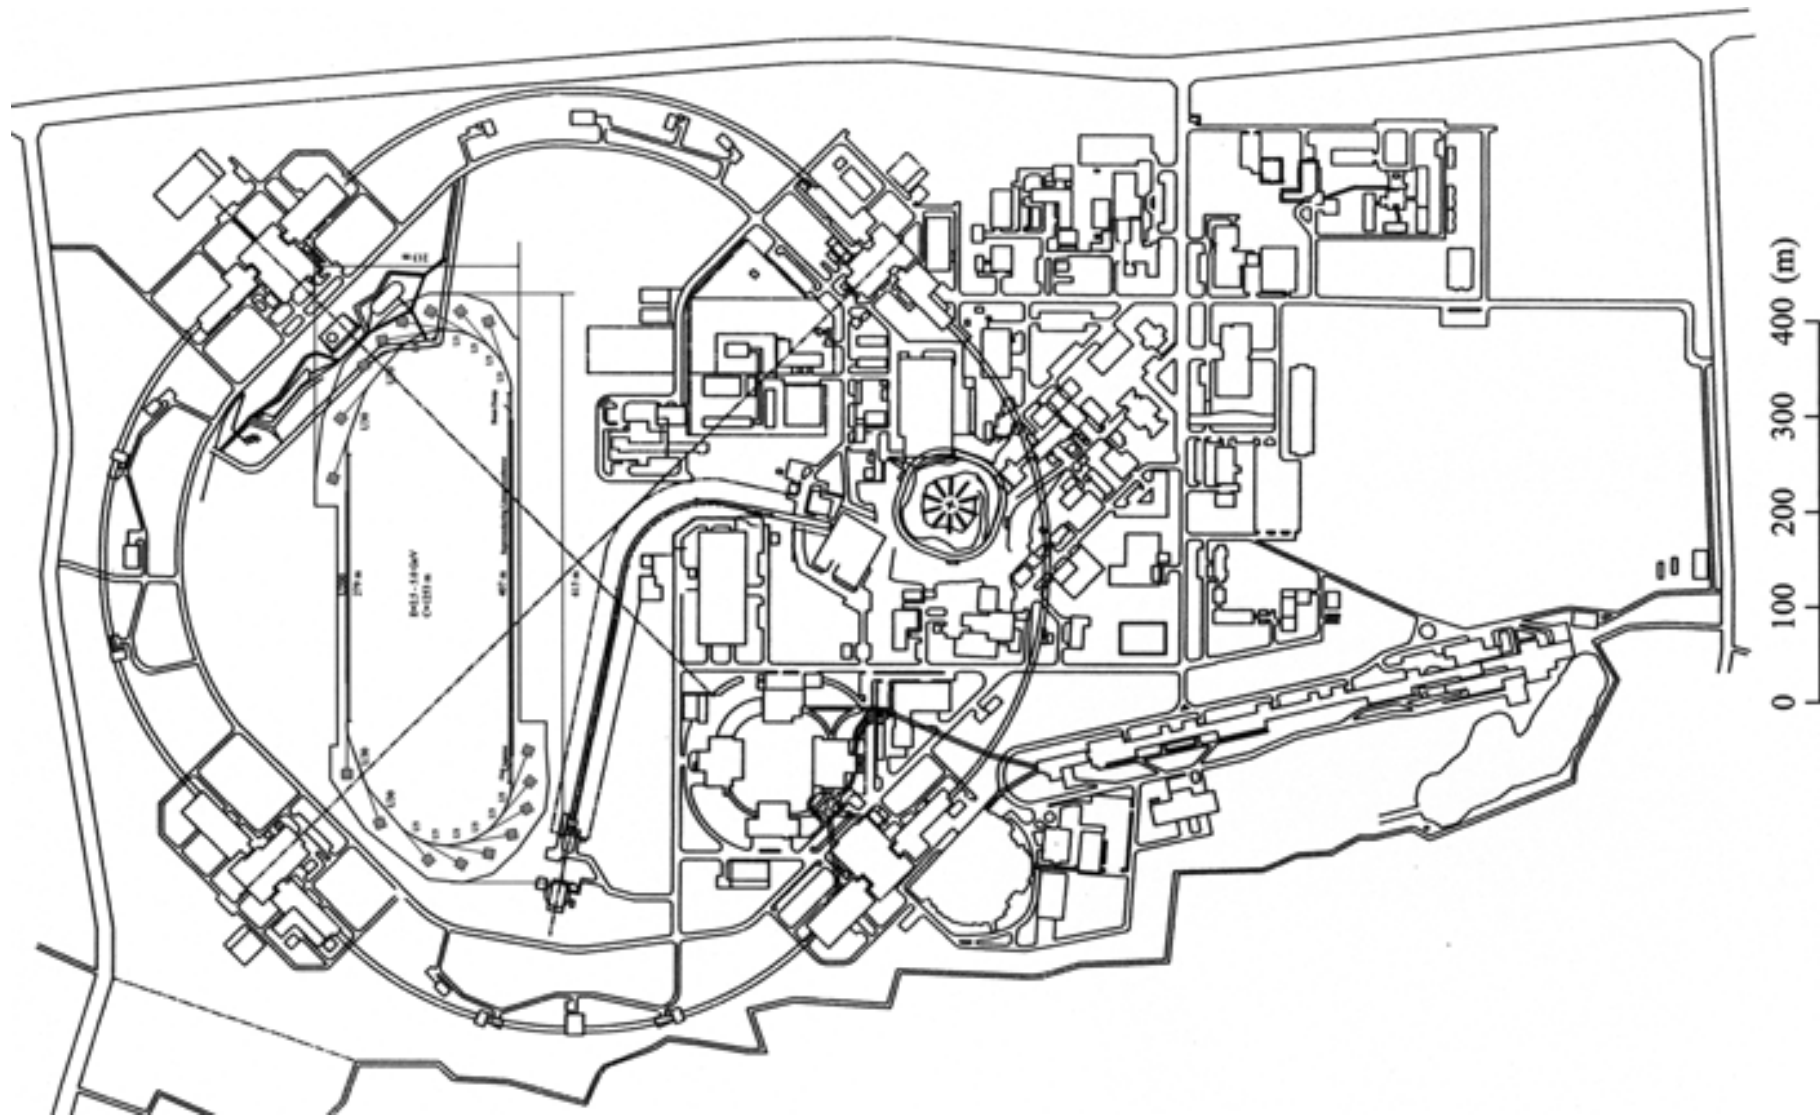

Brilliance and coherent fraction spectra from ERL(5GeV, 0.3GeV)

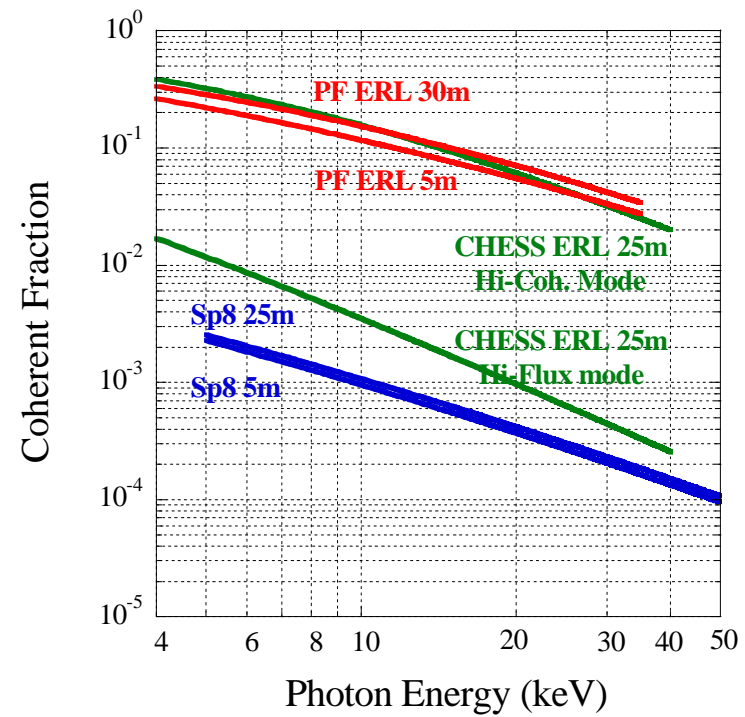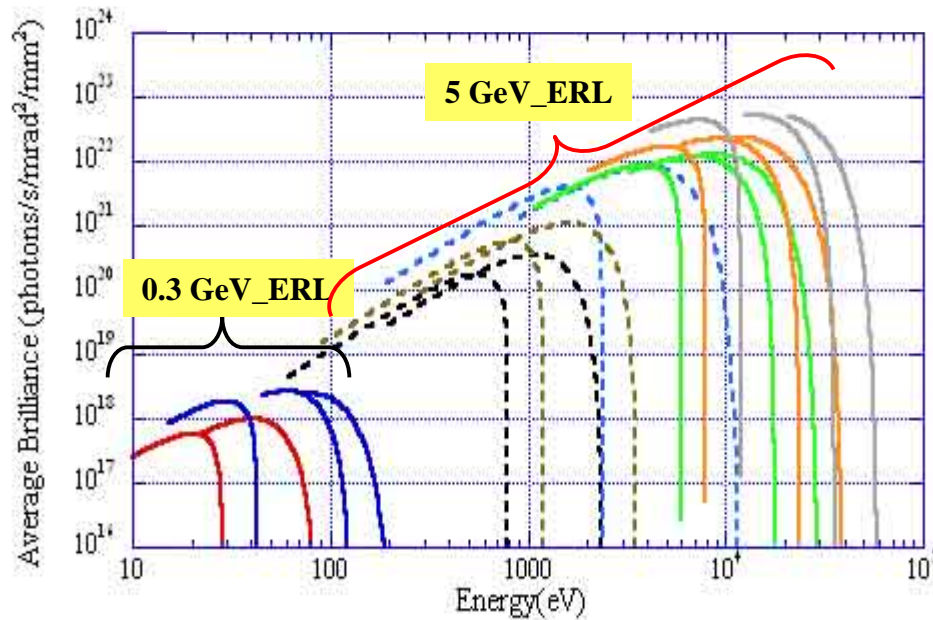

It is possible to cover the energy range from VUV to X-ray by using 5GeV ERL and 0.3GeV ERL.

Coherent fraction expected from ERL. It is possible to achieve the values of 10-20% at the energy range of 10keV.


Scientific cases at PF-ERL

- Scientific subject opened by **coherent X-rays**
 - #Structural analysis of non-crystalline materials
 - #Phase contrast imaging
 - #Investigation at the fluctuation of several domains by means of X-ray photon correlation spectroscopy
- Scientific subjects opened by **short pulses (sub-pico second)**
 - #Investigation of non-equilibrium dynamics.
 - #Study of spin dynamics in material.
 - #Chemical reaction.
 - #Photo-induced phase transition and related materials
 - #Reaction process at protein (life science)
- Scientific cases opened by **nano beam**
 - #Combination with the other general experimental method.




Local structural analysis, Local electronic state, Microscopic studies,
Structural analysis of small crystals (~100 nm), etc.

Photo-induced phase transition (Strongly-Correlated Electron Systems)

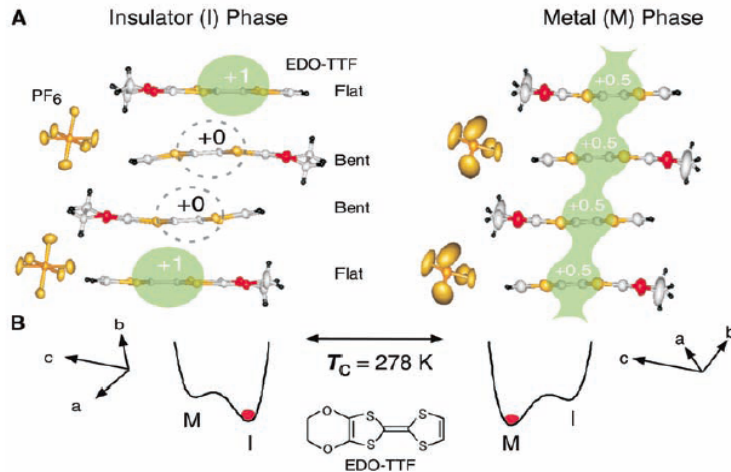


Chollet et al. (2005) Science 307, 86

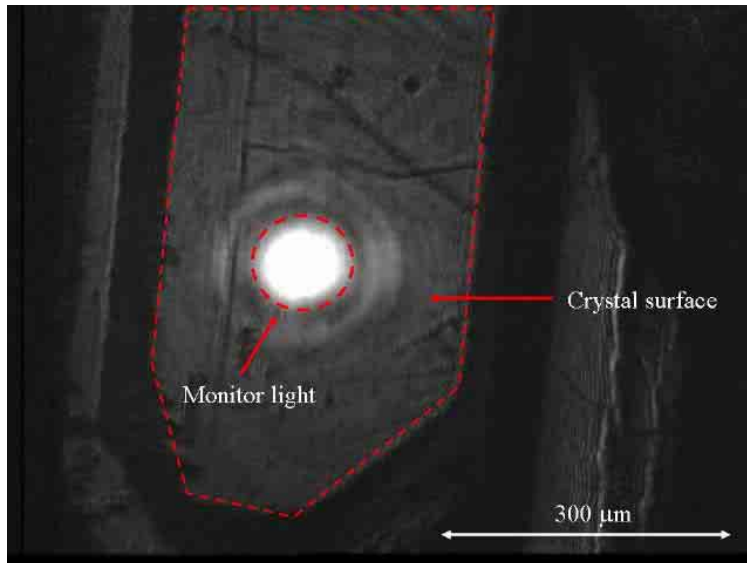

Koshihara et.al. (Tokyo Institute of Tech.)

**Sub-pico second Photo-induced
metal-insulator phase transition**
- Application for a THz-switching device -

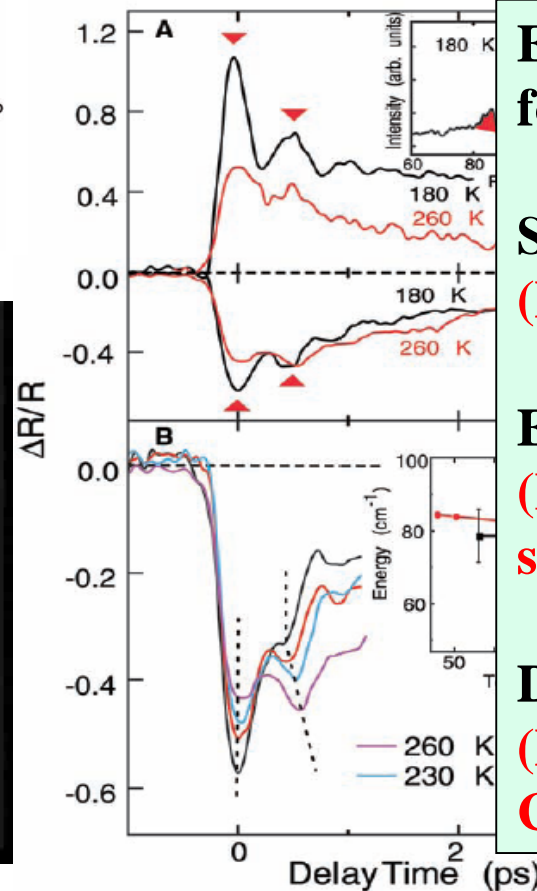

**ERL will provide us
following information!!**

Structure?
(X-ray diffraction)

Electronic state?
**(Photo-emission
spectroscopy)**

Domain formation?
**(X-ray Photon
Correlation Spectroscopy)**


ERL Project Office

Collaboration between KEK , JAEA and ISSP

ERL project office has been organized officially in KEK from 1/April/2006.




Kick-off meeting (26/Oct./2005) for ERL project with directors of IMSS in KEK and KPSI in JAEA, and more than 50 scientists , who were interested in ERL project.

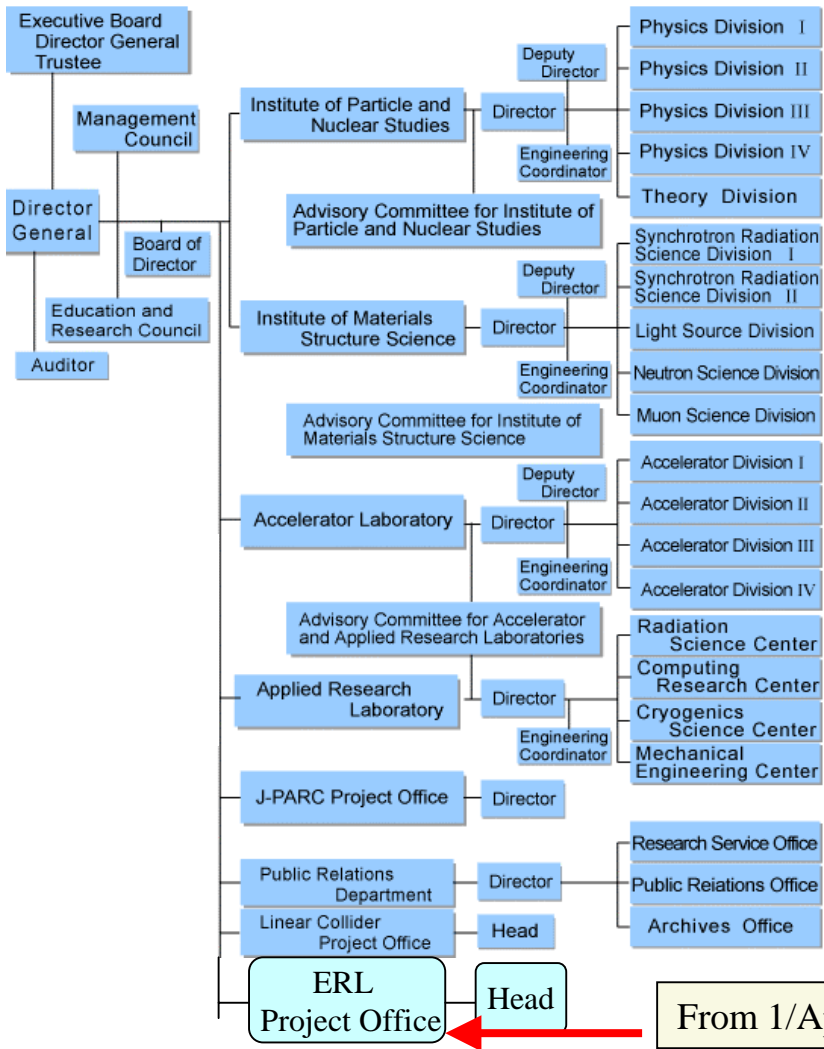

From 1/April/2006

Structure of the ERL Project Office

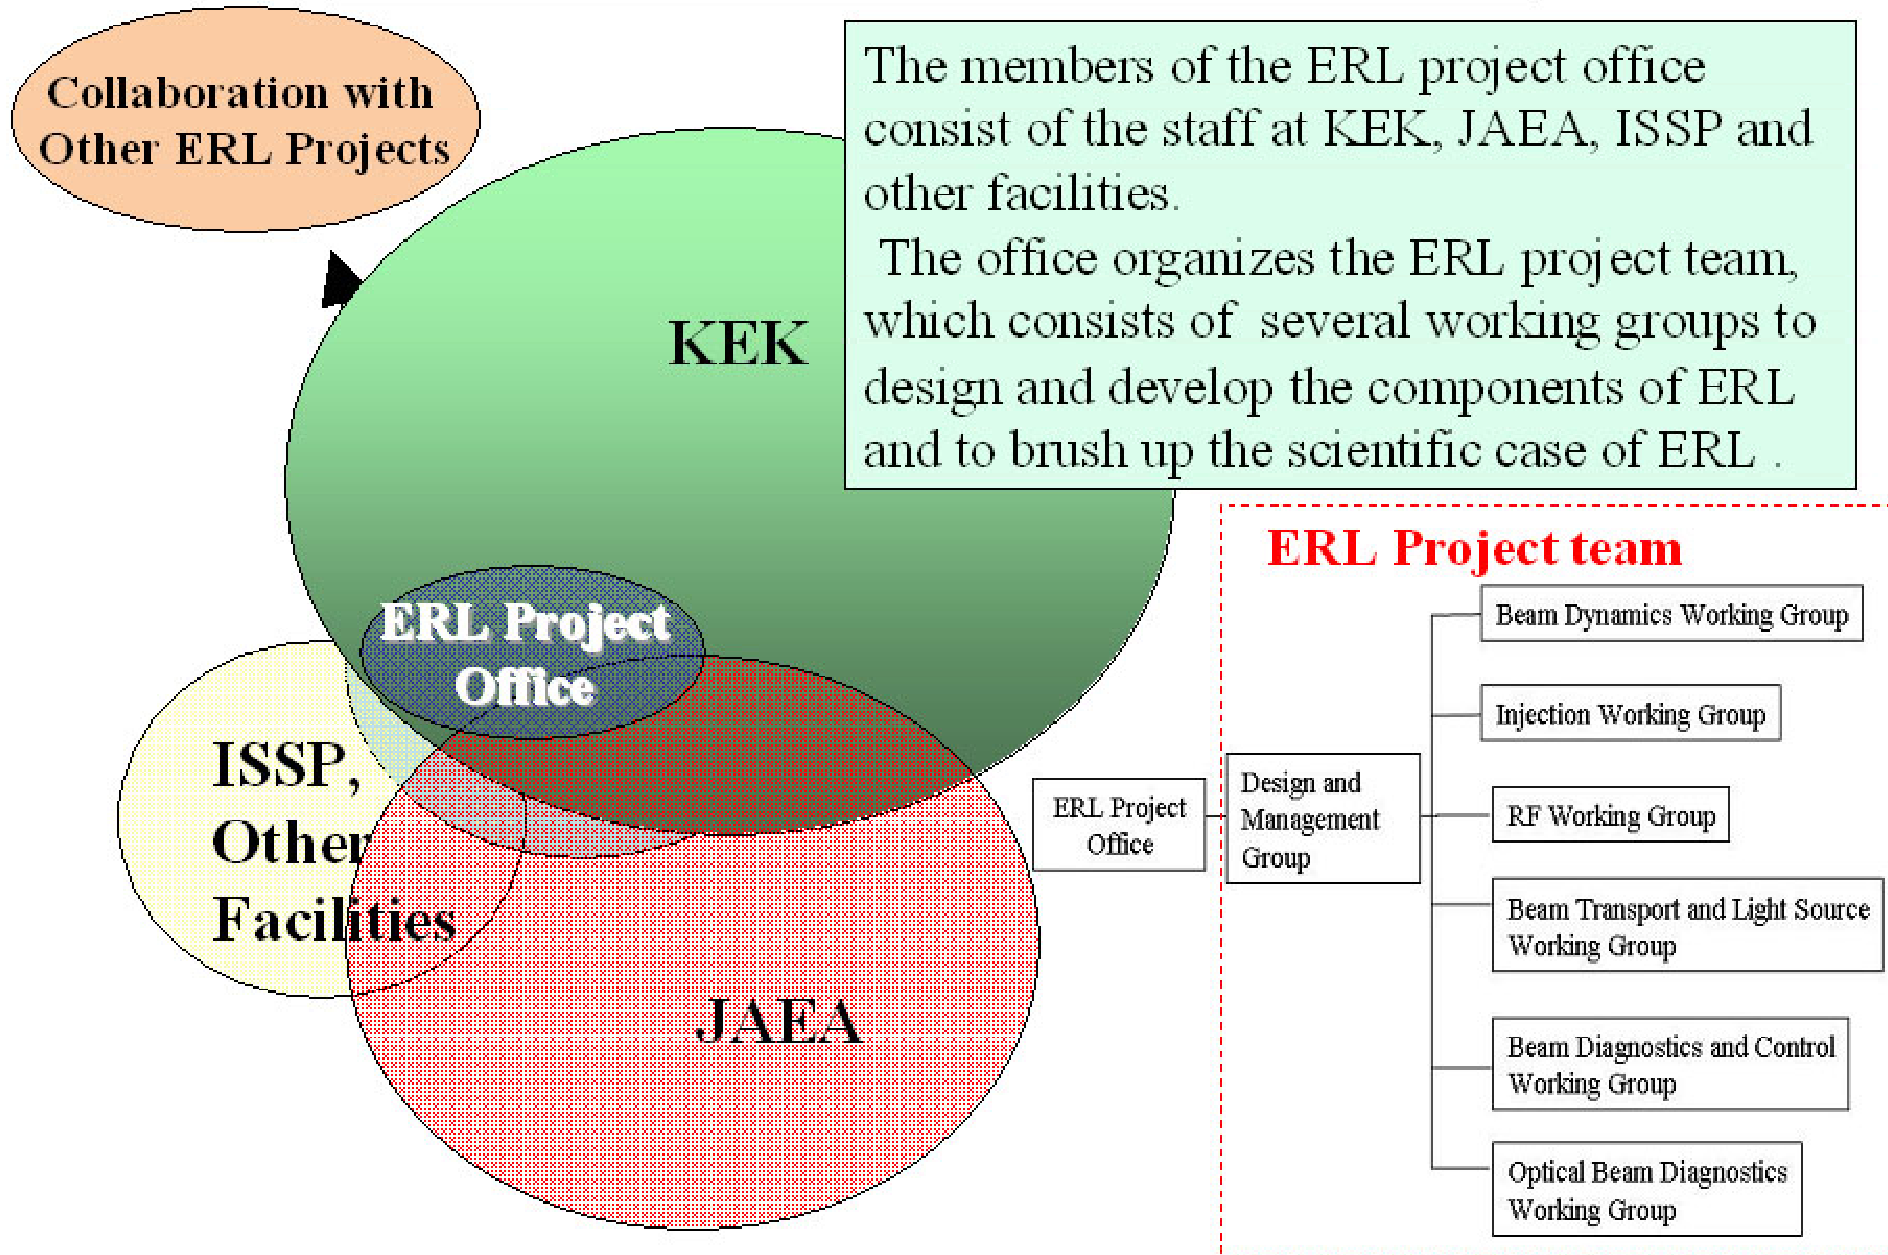

R&D Plan towards the ERL Light Source



Development of key components


- **DC photocathode gun (JAEA group)**
 - Ultra-low emittance & high current
 - 500 kV, NEA GaAs (super lattice)
- **Superconducting cavities and cryomodules (KEK group)**
 - under basic design.
 - Close collaboration with ILC team for basic technologies

ERL test facility

- **Testing critical components under beam operations**
- **Generation and acceleration of ultra-low emittance beams**
- **Investigation of accelerator physics issues (CSR, beam losses etc.)**

R&D Status: Low-emittance gun (JAEA)

average current > 100mA



normalized emittance < 0.1 mm-mard

DC gun with NEA-GaAs cathode (most promising)

<Strategy for gun development>



- **Superlattice GaAs photocathode**
 - quantum confinement effects
 - high-average current and small emittance
 - collaboration with Nagoya Univ.
- **DC gun**
 - 250-kV, 50mA gun (making full use of property of JAEA-FEL)
 - ultra-high vacuum for a long-life cathode
 - load-locked cathode preparation

Photocathode Test Bench (JAEA)

cathode holder




UHV chamber and laser

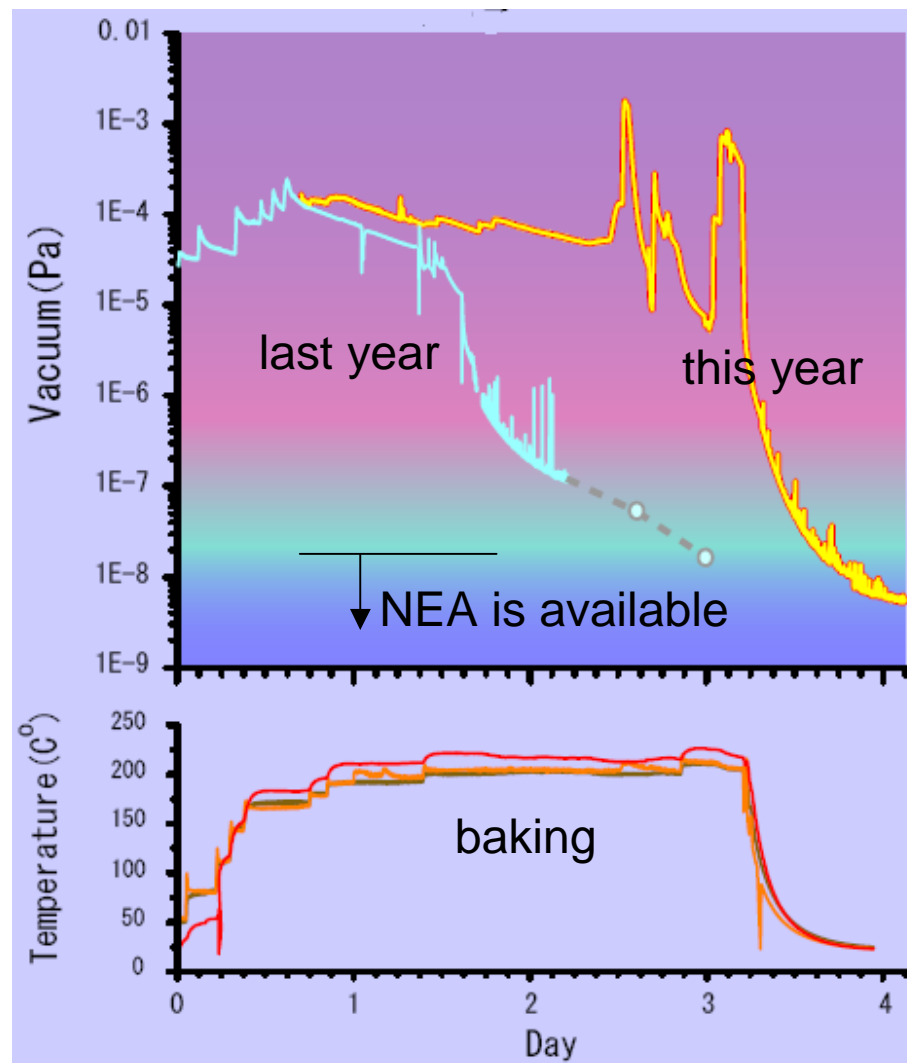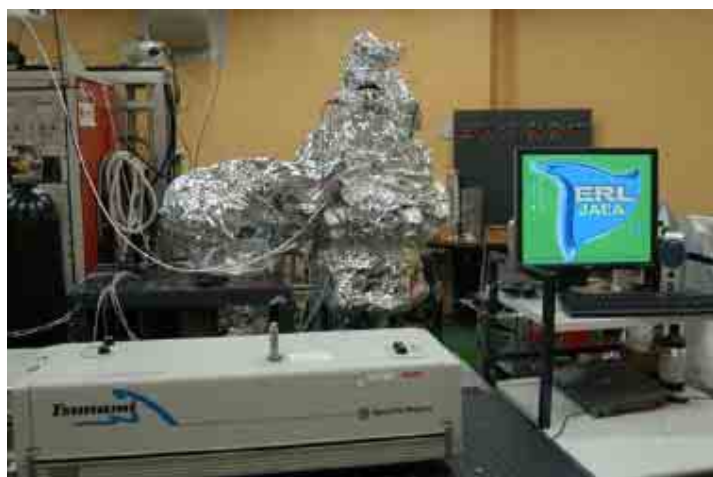

Development of a DC gun (JAEA)

high-voltage test was completed (245kV).

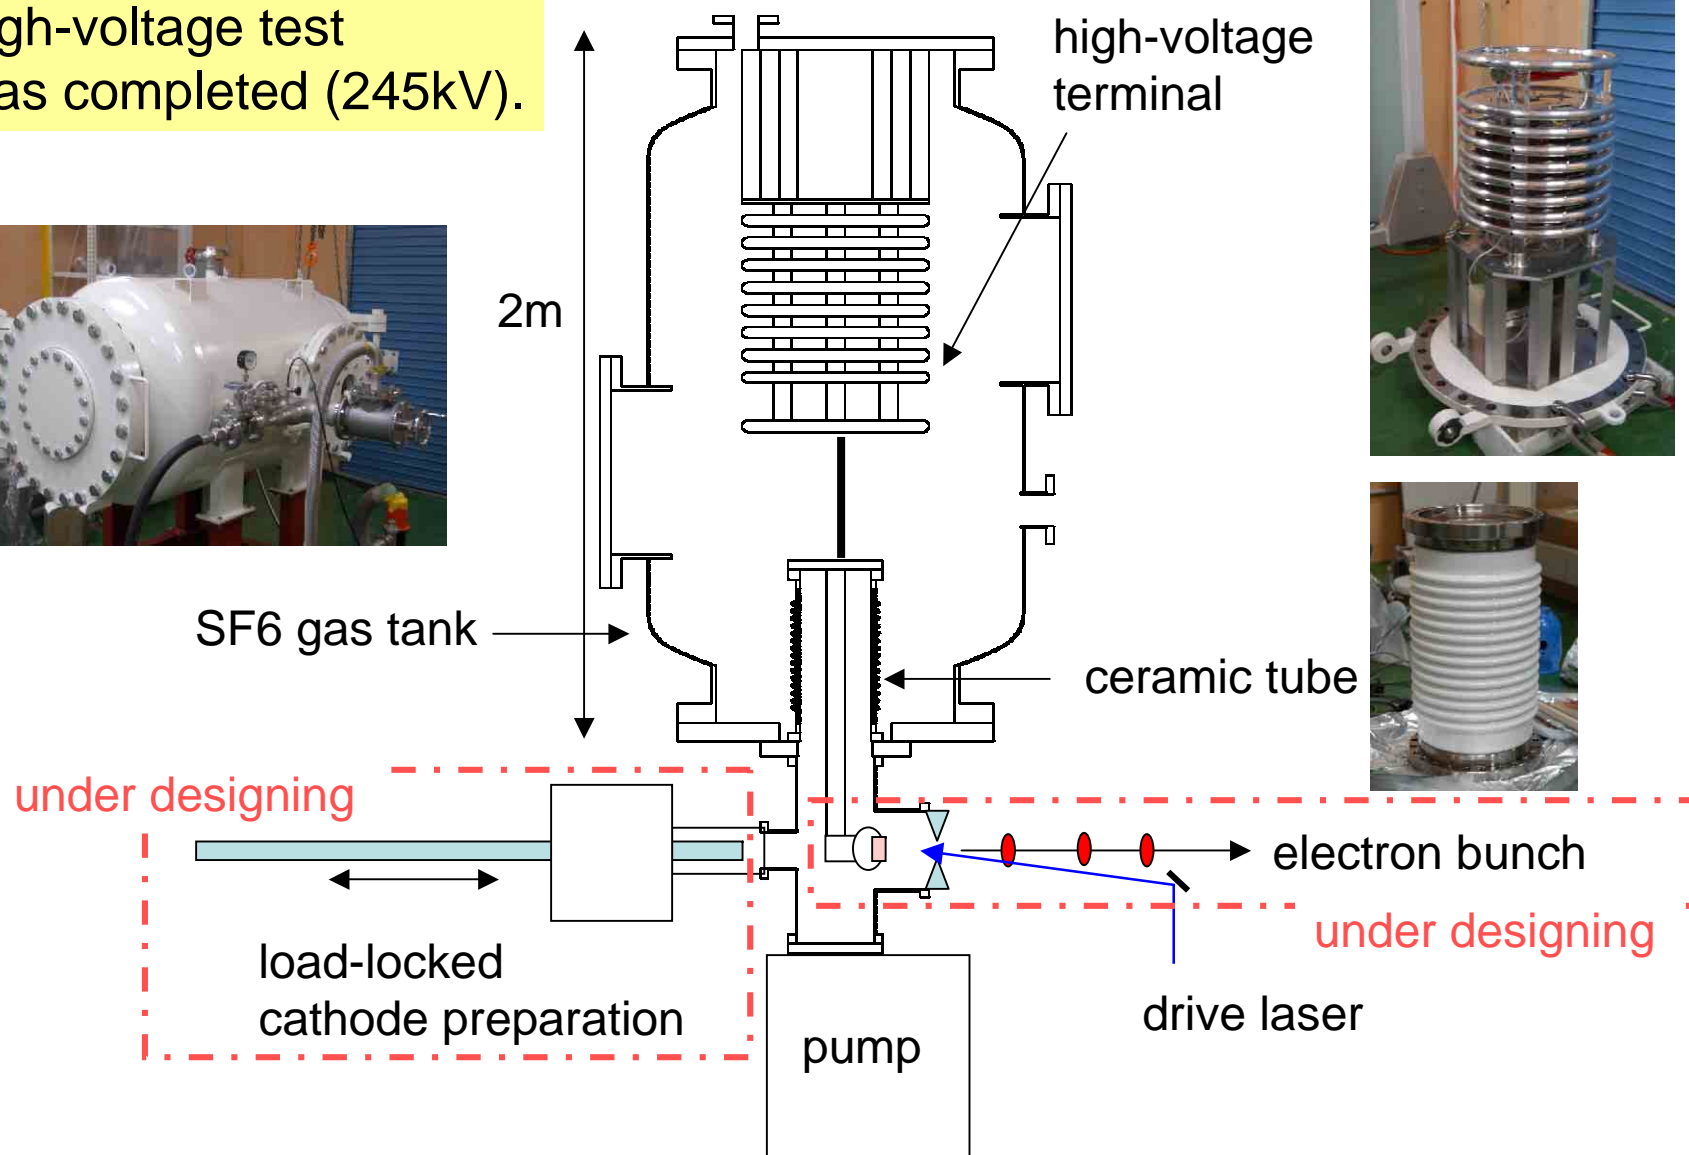


Development of superconducting cavity for ERL

- **Required performance for main linac**
 - $E_{acc}=10\sim 20\text{MV/m}$
 - Heat load $10\sim 40\text{W/m}(@2\text{K})$
 - 1.3GHz operation
 - Beam current 100mA
 - Need strong HOM (Higher Order Mode) damping to suppress Beam-breakup instabilities and heat load
- **Required performance for injector**
 - $5\text{MV} \times 100\text{mA} = 500\text{kW}$ → Need high power coupler
- **Close collaboration with ILC cavity group to develop several components efficiently.**


R&D Status: Superconducting Cavities (KEK)

- R&D team, led by T. Furuya, has organized.
- Close collaboration with Superconducting Test Facility (STF) team at KEK.

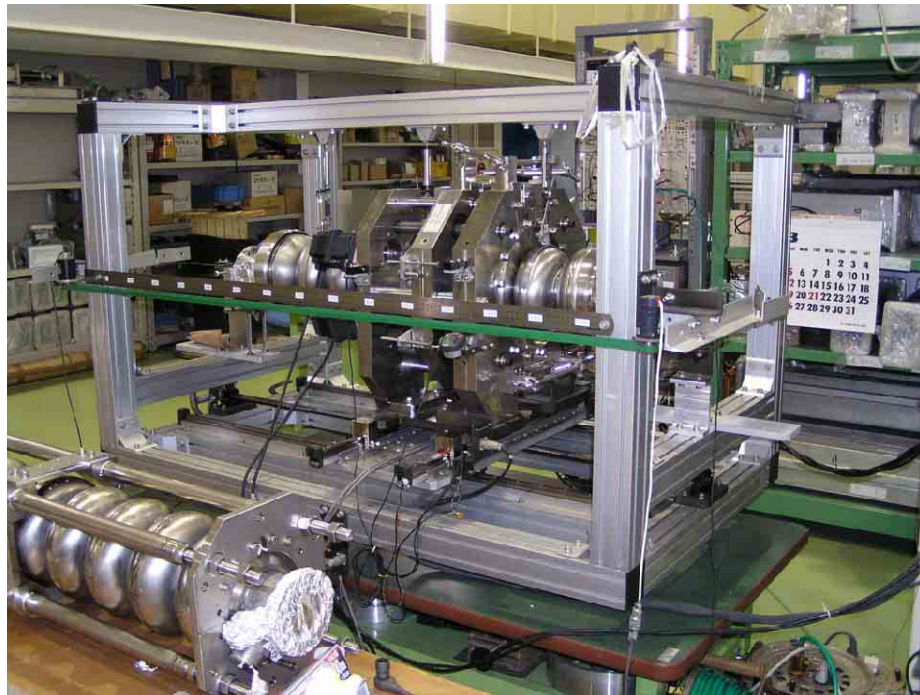

Developing SC-cavities for the STF (courtesy, S. Noguchi).


Site for the ERL Test Facility

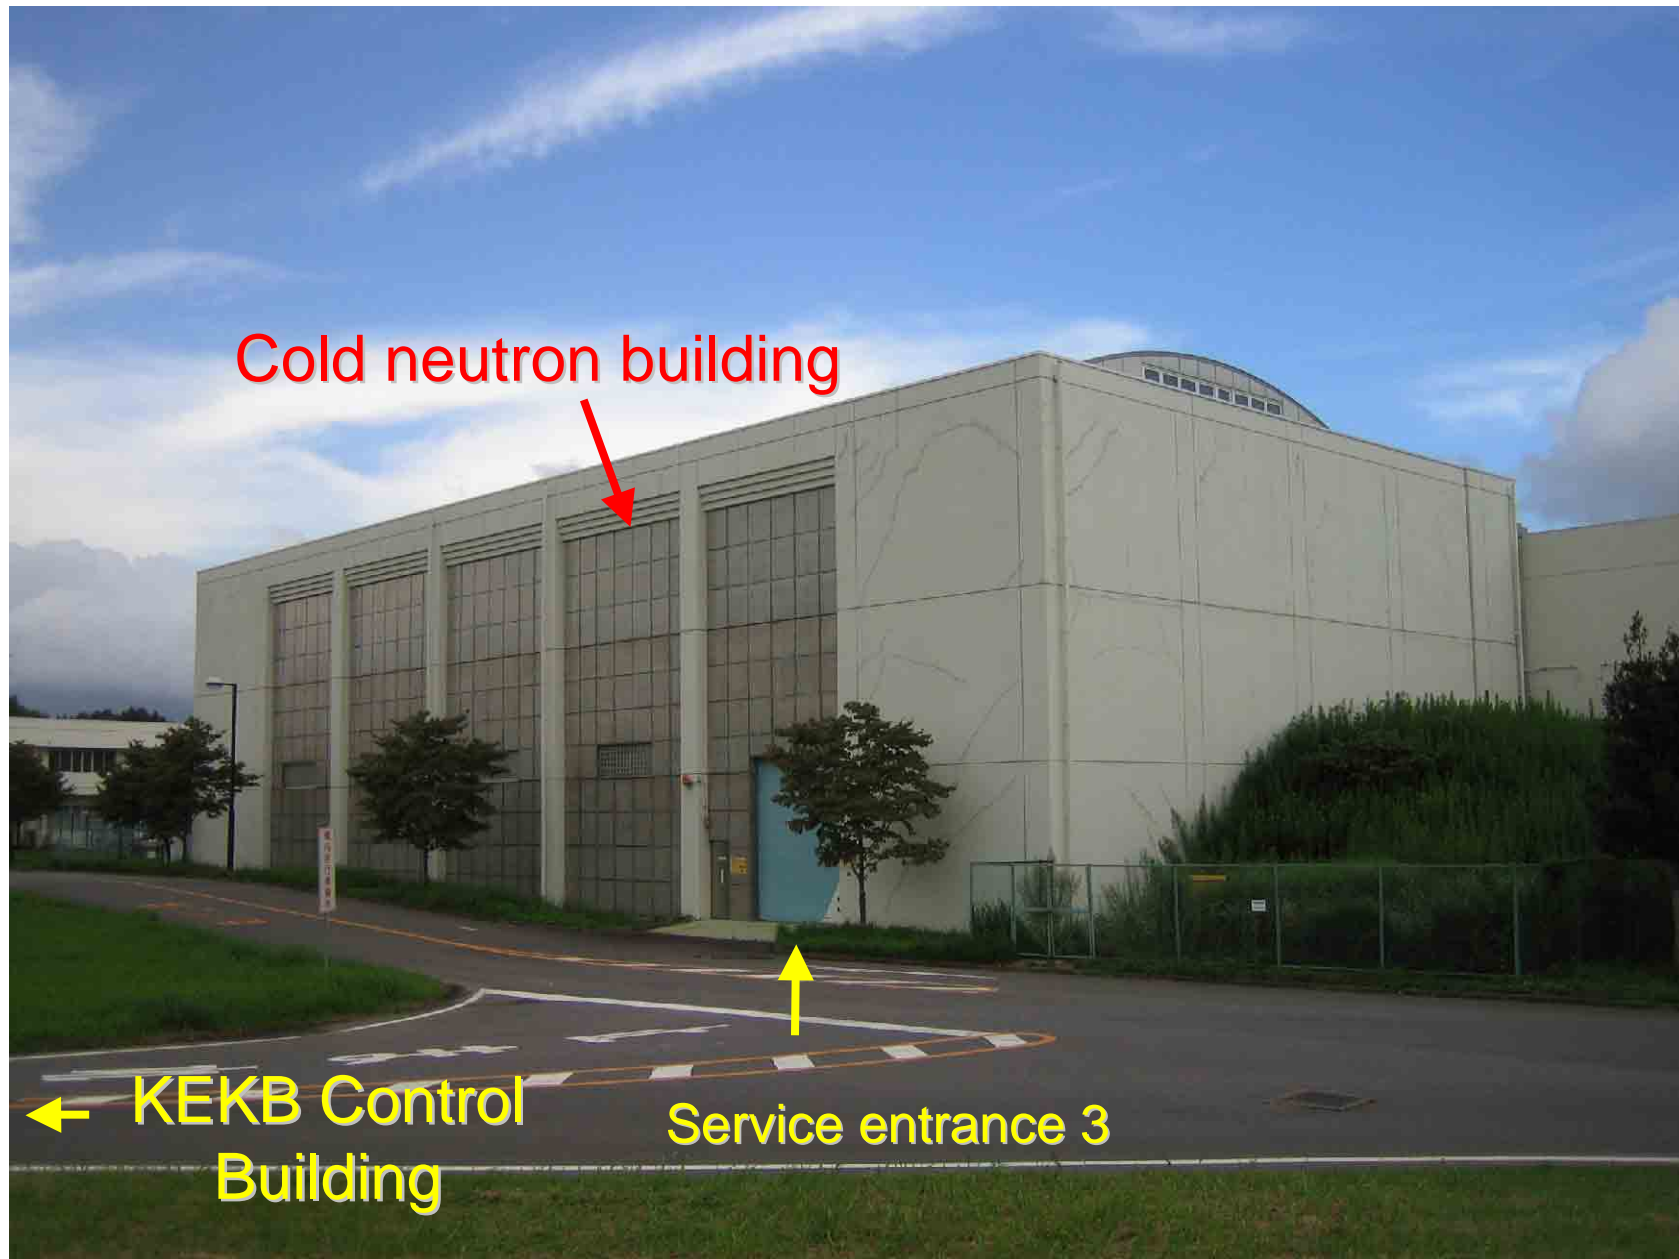

Plan for ERL Test Facility

Maximum current: 100 mA
Beam energy: 60 – (200) MeV

Normalized emittance: 1 – 0.1 mmmrad
Injection energy: 5 MeV (15 MeV)

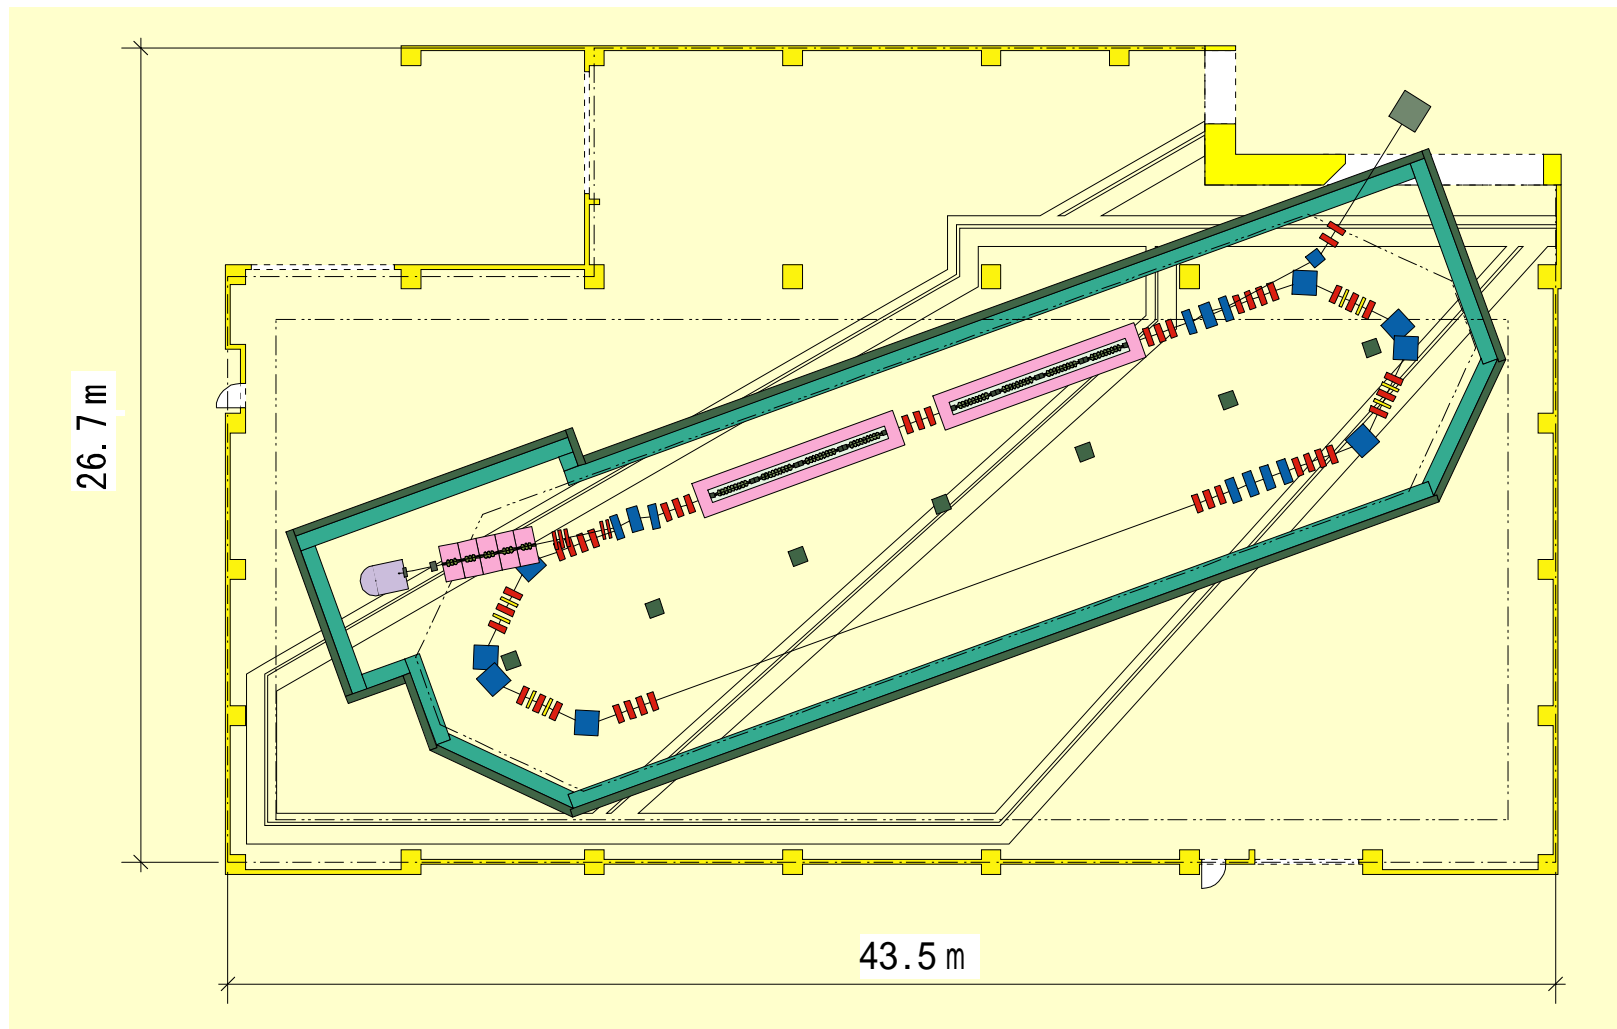

Time schedule of ERL project



- 1) Construction of a 60~200MeV class ERL (prototype) in an experimental hall which was used for cold neutron science.
- 2) Demonstration of the principle of the ERL until 2010.
- 3) We shall start construction of 5 GeV class ERL from ~2011.
- 4) We hope to start the user operation of ERL from ~2015.

Summary (1)

- ERL is one of the most promising candidates for future light source.
- ERL project has been progressed under the collaboration with KEK, JAEA, ISSP and other facilities.
- To resolve technical & physical challenges, an ERL test facility is under consideration at KEK.
 - To test critical components under beams
 - To generate and accelerate ultra-low emittance beams
 - To investigate accelerator physics issues
- The ERL test facility will consist of a 5-MeV injector, 1-2 cryomodules, a return loop and a beam dump. The energy will be 60 – 200 MeV.
- Design of the test ERL is underway.
- R&D for the DC photocathode gun (at JAEA) and for the SC cavities (at KEK) were started.

Summary (2)

- ERL Projects

US: Cornell University

UK: 4GLS

*Collaboration network between
Asia/Oceania Synchrotron
Radiation Facilities*

Japan: Collaboration between KEK, JAEA,
ISSP, and other facilities



Thank you for your attention!