

Present status of ERL project at KEK

PF-ISAC, 3-4/April/2007

H. Kawata

ERL Project Office, High Energy Accelerator Research Organization

Outline

- 1) What is the requirement for the future light source?
- 2) Scientific cases at the ERL
- 3) Present status of the R&D for the ERL project

Dr. Kasuga will present details about the development for key components

What is the requirement for the future light source?

1) Specimen becomes smaller and smaller (nano-structure)

Focused beam size: μm \longrightarrow nm

2) Detailed information about electronic states

Higher Energy resolution

3) Structural analysis of non-crystalline materials

Coherent X-ray is essential!

4) Studies for non-equilibrium states


Short pulse (sub-pico second) is essential!

High brilliant light source
for general use

Coherence and short pulse
for cutting-edge science


It is important to realize both of them!

What kinds of accelerator are needed?

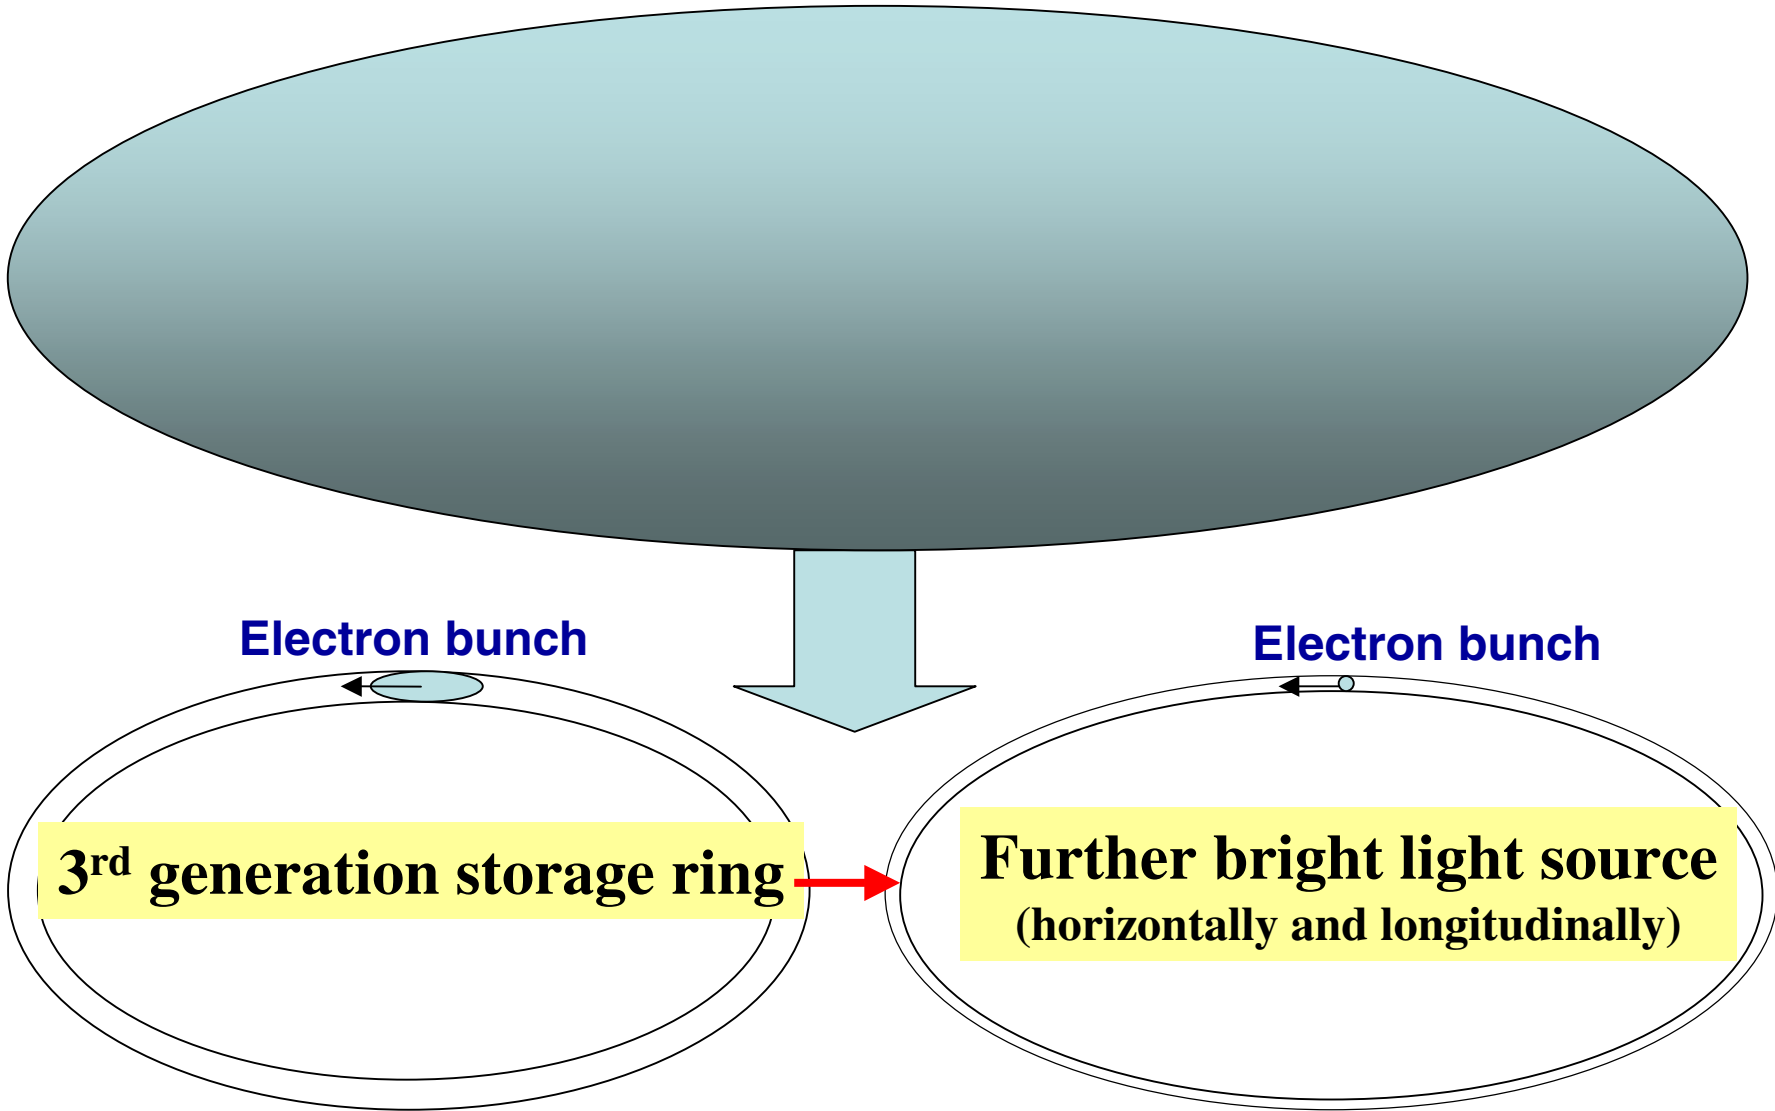

Specification of the synchrotron radiation from the future light source

Energy region : VUV-X (30eV-30keV)
Brilliance: 10^{21} - 10^{23}
 photons/sec/mrad²/mm²/0.1%B.W. @1~10 keV
Coherent fraction: 10~20% @ 10keV
 ↓
Emittance: 10pmrad ~ $\lambda/4\pi$ @ 10keV
Short pulse: ~100 fs
Number of ID beamlines: ~30 lines

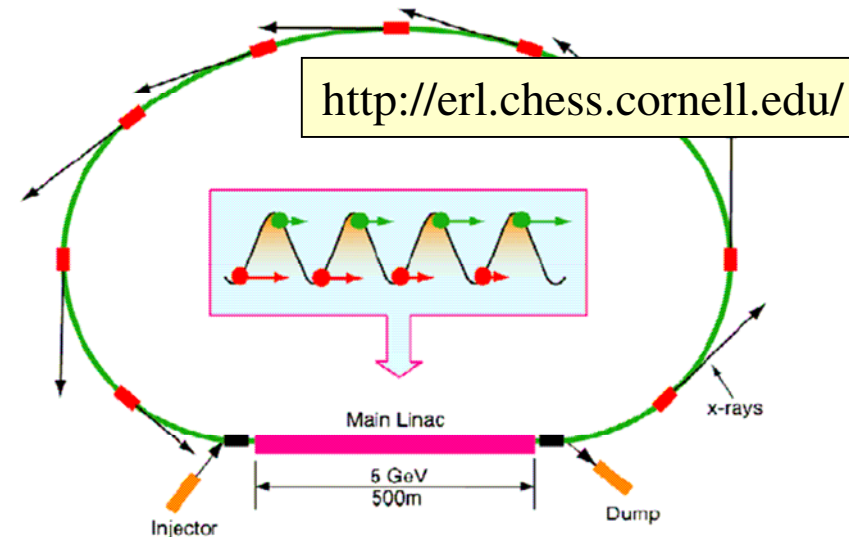

Energy Recovery Linac(ERL)

ERL is promising!


#) Linac based light source:

- 1) Emittance can be improved by a factor of $1/\gamma$ from a natural emittance .*
- 2) Short pulse of the order of 0.1~1 pico-second can be available.*

#) A great numbers of ID-beamlines can be available.

#) ERL will not provide extremely high peak brilliance, but high averaged brilliance. This feature will be suitable to keep a character for the proving light source as an usual synchrotron radiation experiments.

PF - ERL

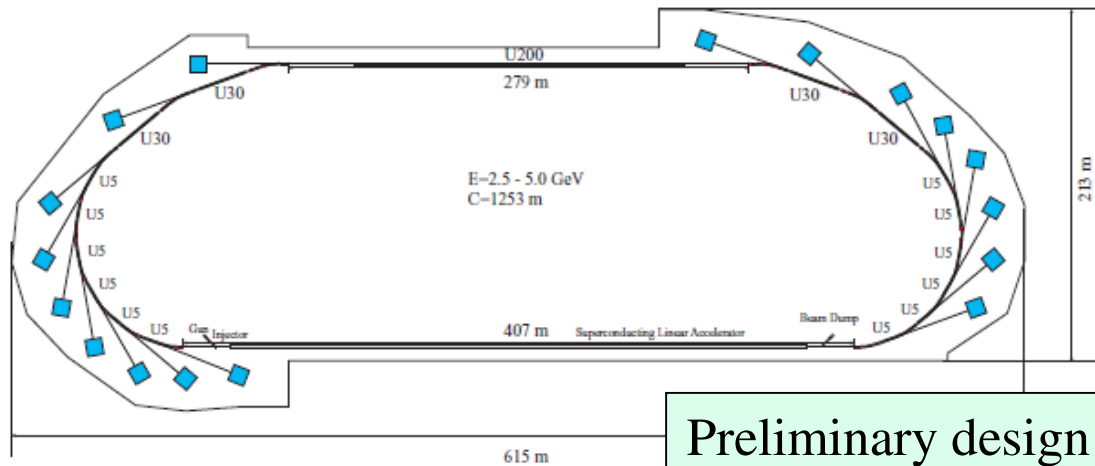


Preliminary design of PF-ERL at 2002



		PF-ERL undulator @ 5 GeV		SPRING-8 undulator @ 8 GeV	
Beam current		100 mA	100 mA	100 mA	100 mA
Undulator length		30 m	5 m	25 m	5 m
Source size (μm)	horizontal	37.8	18.2	892	892
	vertical	37.8	18.2	22.8	10.6
Source div. (μrad)	horizontal	4.1	9.8	37.4	38.4
	vertical	4.1	9.8	4.3	10
Beam size @ 50 m (μm)	horizontal	244	510	2761	2813
	vertical	244	510	236	509
Average brilliance(ph/s/0.1%/mm ² /mr ²)		6.0×10^{23}	7.6×10^{22}	2.2×10^{21}	5.0×10^{20}
% beam coherence		19	15	0.14	0.13

At the case of 8 keV photon energy

Size of 5-GeV class ERL

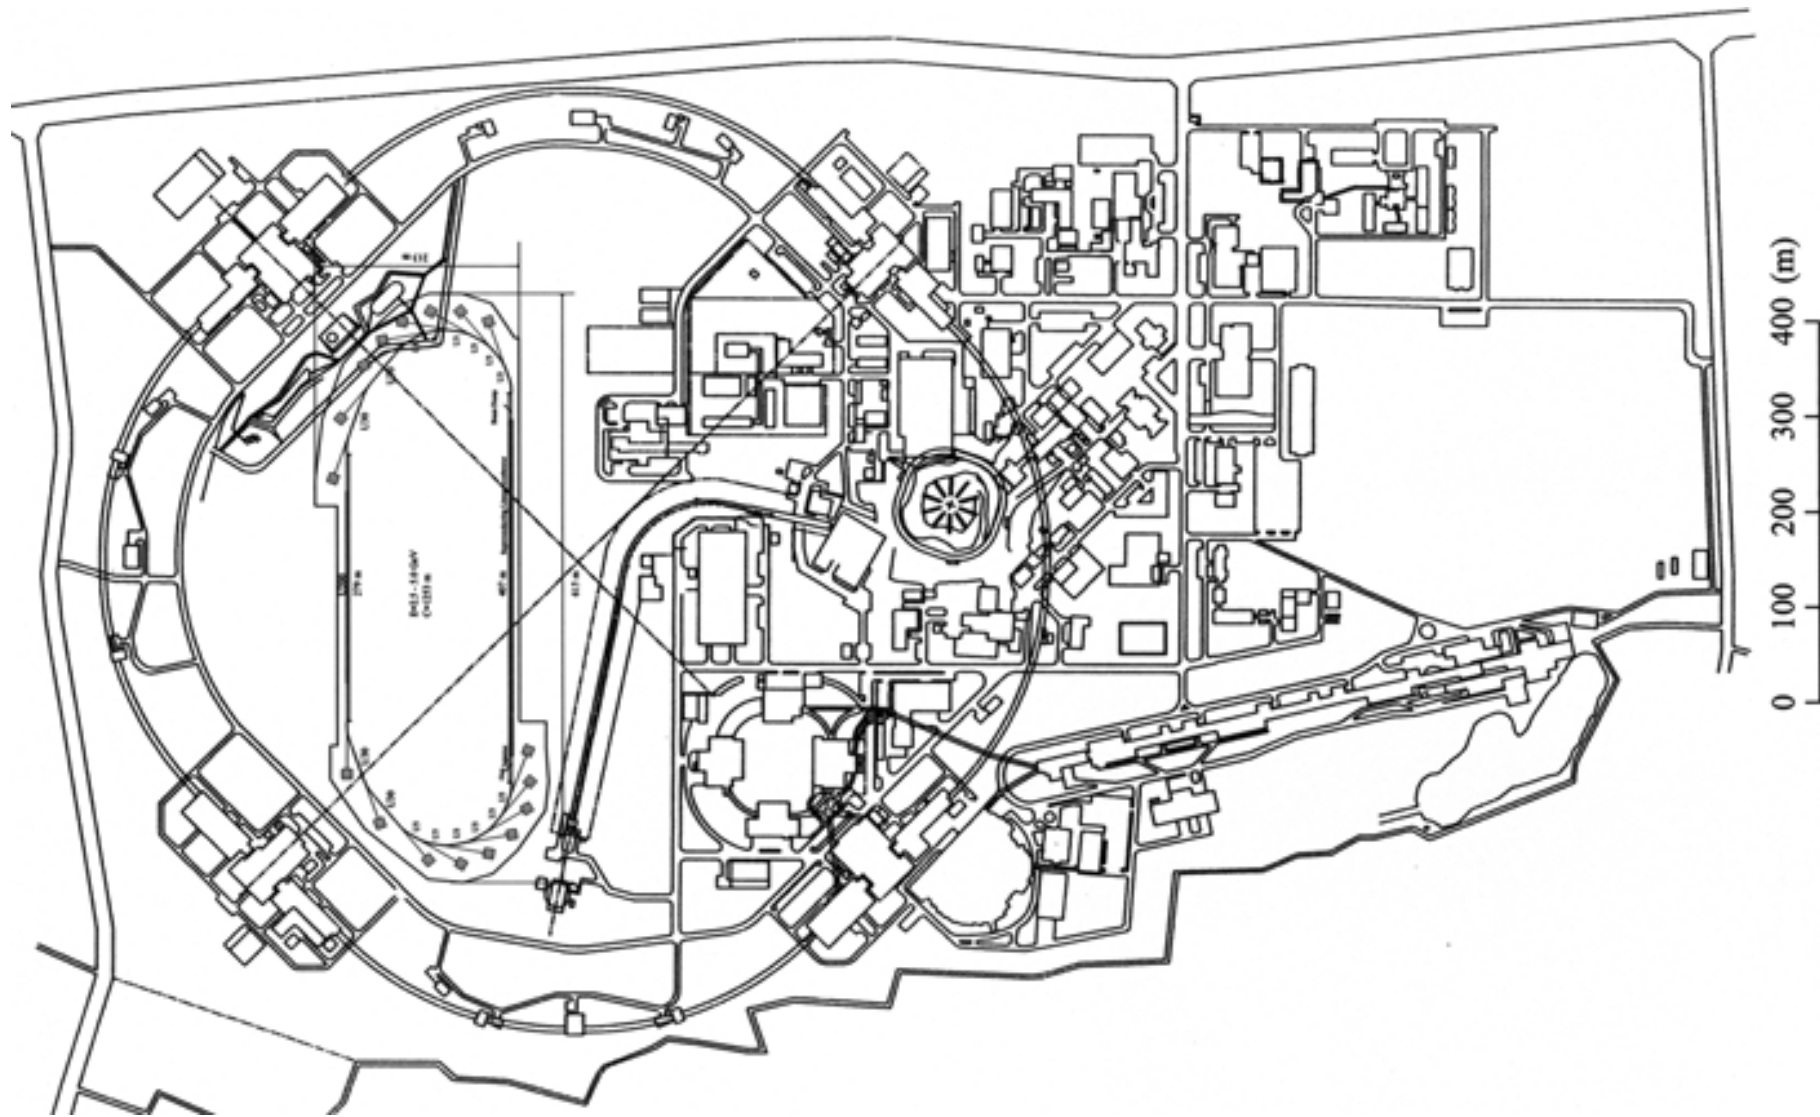

Brilliance and coherent fraction spectra from ERL(5GeV, 0.3GeV)

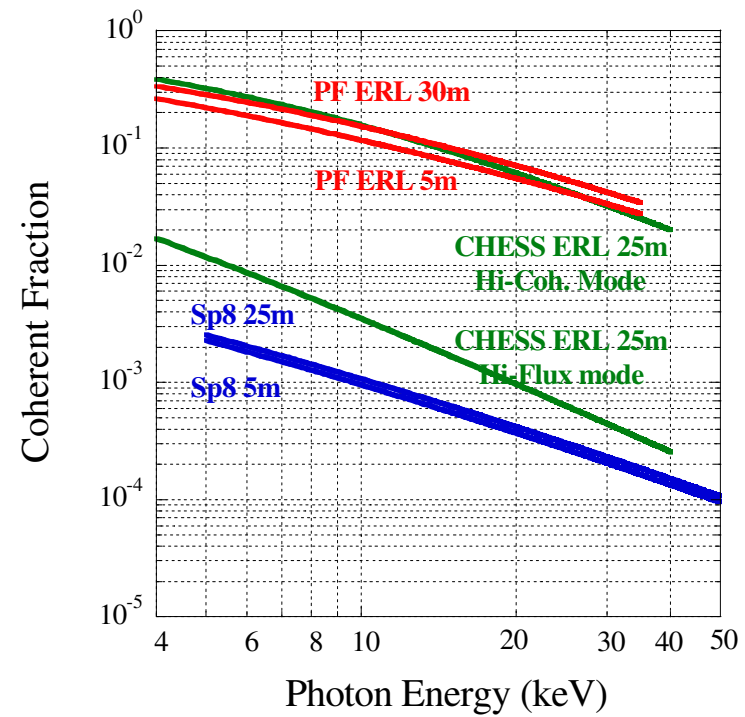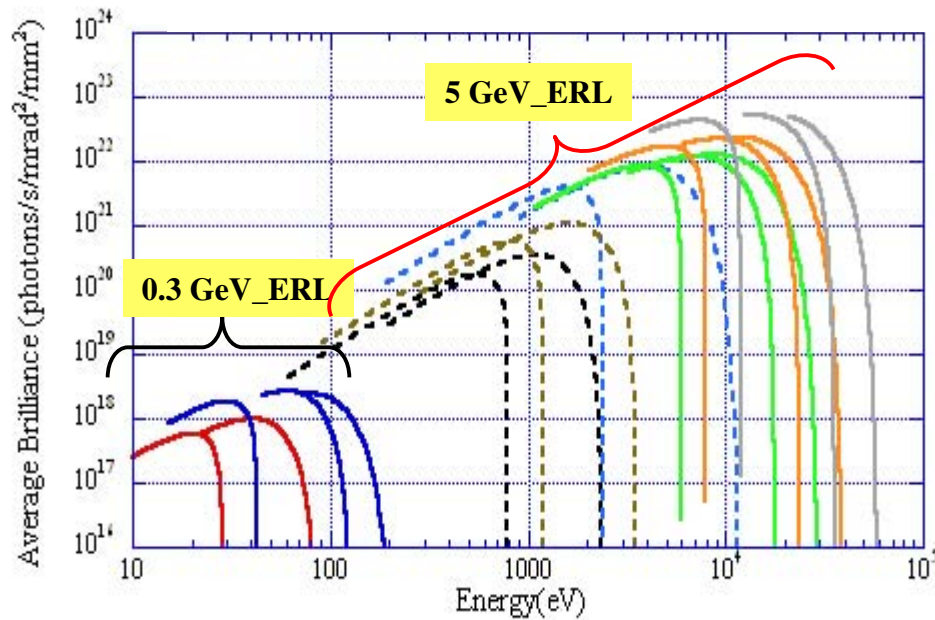

It is possible to cover the energy range from VUV to X-ray by using 5GeV ERL and 0.3GeV ERL.

Coherent fraction expected from ERL. It is possible to achieve the values of 10-20% at the energy range of 10keV.


Scientific cases at PF-ERL

- Scientific subject opened by **coherent X-rays**
 - #Structural analysis of non-crystalline materials
 - #Phase contrast imaging
 - #Investigation at the fluctuation of several domains by means of X-ray photon correlation spectroscopy
- Scientific subjects opened by **short pulses (sub-pico second)**
 - #Investigation of non-equilibrium dynamics.
 - #Study of spin dynamics in material.
 - #Chemical reaction.
 - #Reaction process at protein (life science)
- Scientific cases opened by **nano beam**
 - #Combination with the other general experimental method.




Local structural analysis, Local electronic state, Microscopic studies, Structural analysis of small crystals (~100 nm), etc.

Photo-induced phase transition (Strongly-Correlated Electron Systems)

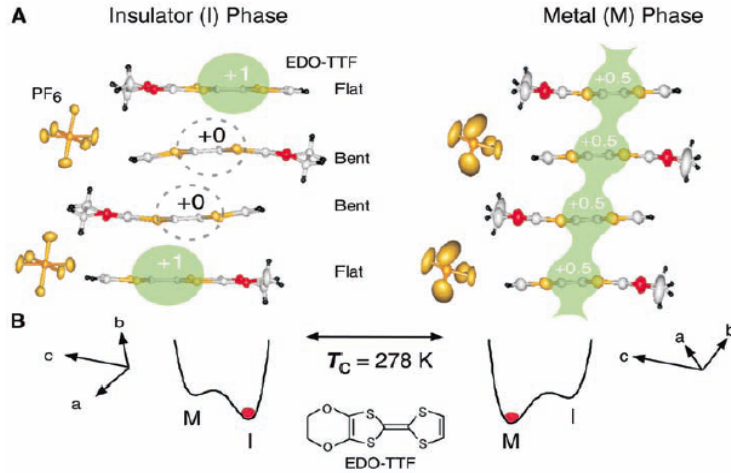


Collet et al. (2005) Science 307, 86

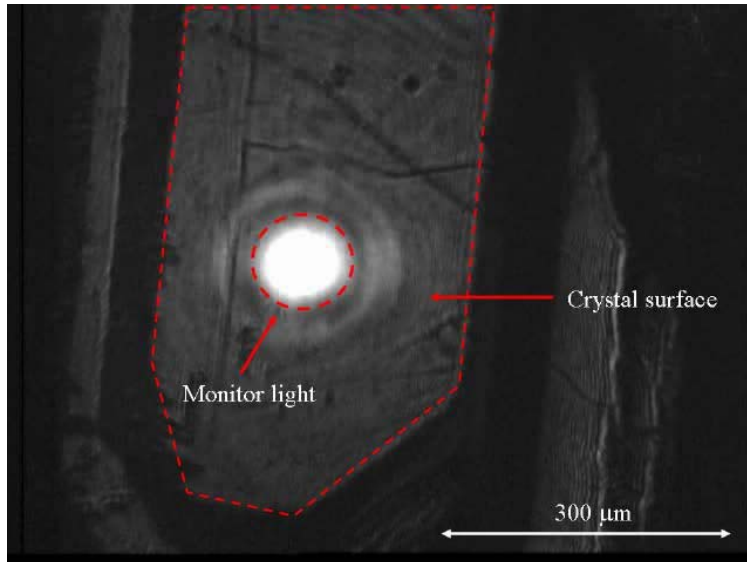

Koshihara et.al. (Tokyo Institute of Tech.)

**Sub-pico second Photo-induced
metal-insulator phase transition**
- Application for a THz-switching device -

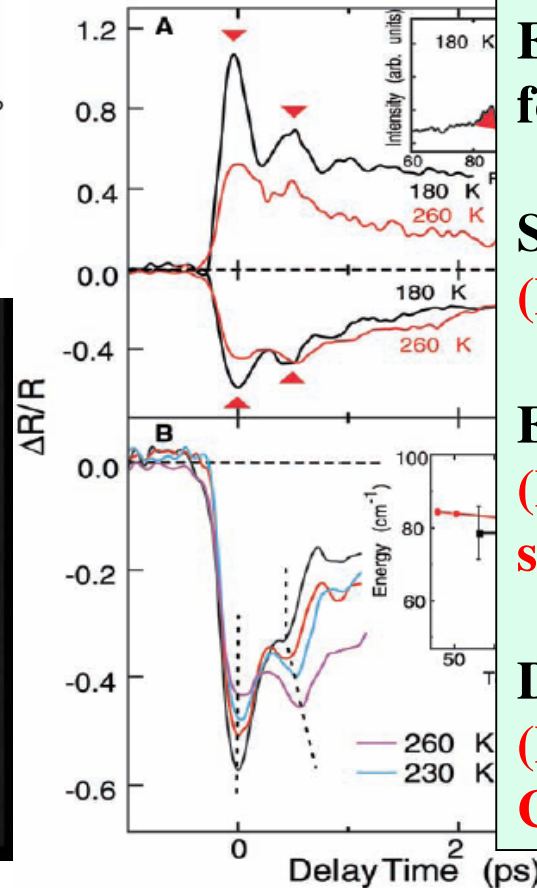


**ERL will provide us
following information!!**

Structure?
(X-ray diffraction)

Electronic state?
**(Photo-emission
spectroscopy)**

Domain formation?
**(X-ray Photon
Correlation Spectroscopy)**

Structure of the ERL Project Office

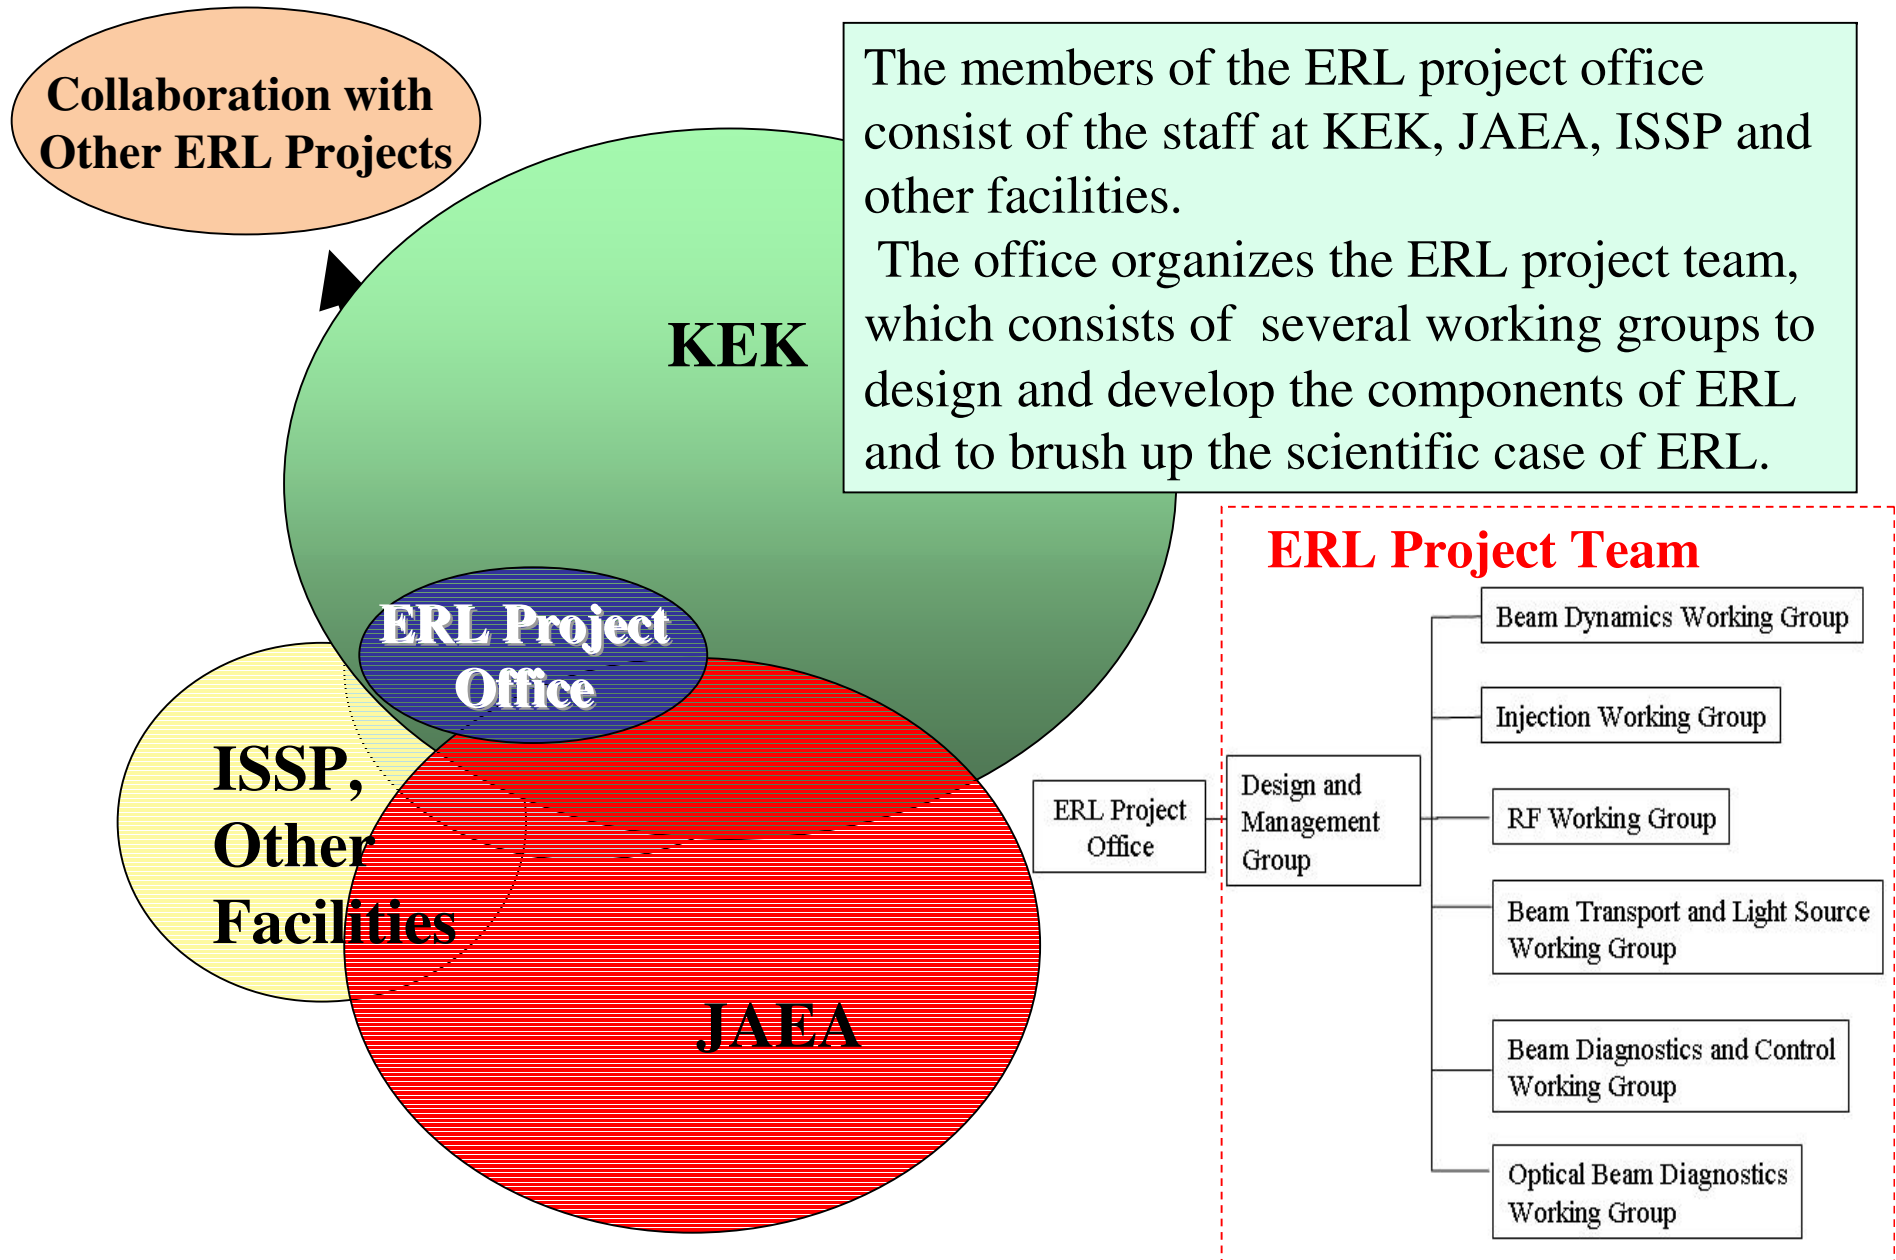

Progress of designing ERL machine

- **Design meeting for ERL**

The design meeting has been held once a month to fix the specification of the ERL test facility and check the items which have been designed by each working group from the view point of the overall design.

- **Presentations of our project**

May/2006: FLS2006 (Hamburg)

Aug./2006: Japanese Accelerator Conference (Sendai)

Aug./2006: Workshop for the future light source at Japan (Okazaki)

Nov./2006: Asia/Oceania Forum for Synchrotron Radiation Research (Tsukuba)

Jan./2007: Conference of Japanese Society for Synchrotron Radiation Research (Hiroshima)

Jan. /2007: KEK-DESY Collaboration Meeting (Hamburg)

Feb./2007: Asian Particle Accelerator Conference (Indore)

Mar./2007: Mini-Workshop for ERL under the collaboration meeting between CLASSE and KEK (Cornell, Ithaca)

MOU with other facilities for collaboration to develop the ERL key components

- Mar./2006: with Japan Atomic Energy Agency.
- July/2006: with Institute of Solid State Physics of Tokyo University.
- Mar./2007: with CLASSE (Cornell Laboratory for Accelerator-based Sciences and education).

R&D Plan towards the ERL Light Source



Development of key components

- DC photocathode gun
- 1.3 GHz CW laser
- Superconducting cavities and cryomodules
- Beam dynamics

ERL test facility

- Testing critical components under beam operations
- Generation and acceleration of ultra-low emittance beams
- Investigation of accelerator physics issues (CSR, beam losses etc.)

Testing SC cavities for main linac,
Studying the instabilities.



Return loop is necessary


Site for the ERL Test Facility



Plan for ERL Test Facility

Maximum current: 100 mA
Beam energy: 60 – (200) MeV

Normalized emittance: 1 – 0.1 mmmrad
Injection energy: 5 MeV (10 MeV)

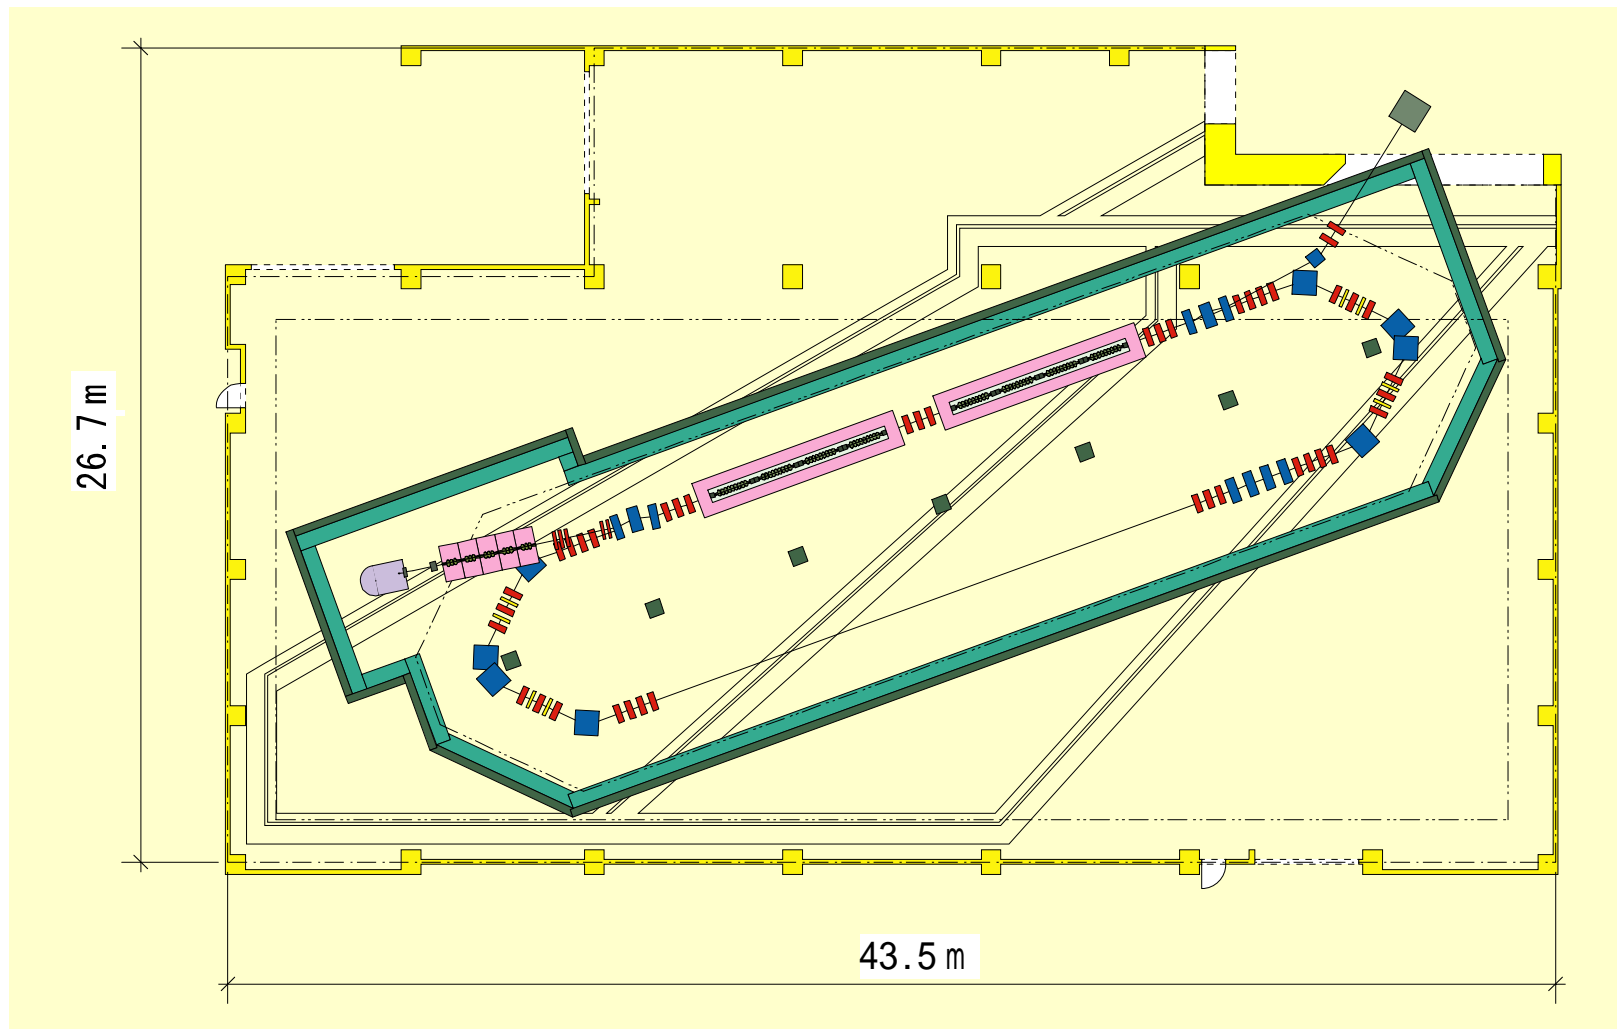

Tentative parameters

Injection energy	5 MeV (10-15 MeV)
Injector beam power	500 kW (1 MW)
Beam energy in arcs	~60 MeV (160-200 MeV)
SC cavities for main linac	9-cells \times 4: single module (two modules)
Normalized emittance	1 mm·mrad (0.1 mm·mrad)
Beam current	10 mA ? (100 mA)
Rms bunch length	Usual mode : $\sigma_{\tau} = 1-2$ ps Short bunch mode: $\sigma_{\tau} \sim 100$ fs?
Test undulator	No undulators (with an undulator)

Initial goals. Final goals are in ().

Time Schedule of the ERL Project

	2006	2007	2008	2009	2010	2011
<u>ERL test facility</u> Design	—————					
Development of key components		—————
Construction			—————		
Commissioning				—————	—————
<u>5GeV ERL</u> Design		—————	—————	—————	—————
Construction						—————

The budget has not been approved yet!

- 1) Construction of a 60~200MeV class ERL test facility
- 2) Demonstration of the principle of the ERL until 2010.
- 3) We shall start construction of 5 GeV class ERL from ~2011.
- 4) We hope to start the user operation of ERL from ~2015.

Mini-Workshop for ERL as part of the collaboration meeting between CLASSE and KEK

CLASSE: Cornell Laboratory for Accelerator-based Sciences and Education

Monday March 12 2007

- | | |
|-------------|---|
| 9:00-9:10 | Opening remark (M. Tigner & H. Kawata) |
| 9:10-9:40 | Present status of ERL project at Cornell University (S. Gruner) |
| 9:40-10:10 | Present status of ERL project at KEK (H. Kawata) |
| 10:10-10:30 | Break |
| 10:30-11:30 | Development of the electron gun and laser system
R. Hajima (JAEA), B. Dunham (Cornell) |
| 11:30-12:30 | Development of the super-conducting cavity for pre-accelerator
H. Sakai (ISSP), H. Padamsee (Cornell) |
| 12:30-13:30 | Lunch |
| 13:30-14:30 | Beam dynamics (S. Sakanaka (KEK), I. Bazarov (Cornell)) |
| 14:30-15:30 | Developments of the superconducting cavity for main-accelerator
M. Sawamura (JAEA), M. Liepe (Cornell) |
| 15:30-15:50 | Break |
| 15:50-16:20 | Comments for the designing of the key components at KEK ERL Projects |
| 16:20-17:20 | Discussion about the collaboration items between CLASSE and KEK |

Tuesday March 13

- | | |
|--------|---|
| 09:00- | Site visit at the ERL prototype of Cornell University |
|--------|---|

Potential Collaboration Items:

1. Input Couplers for Injector - are there Japanese Companies?
2. Input Couplers for Main Linac - are there Japanese Companies?
3. Assembly of Test Cryostat (1 Cavity) and/or 5 Cavity Injector Cryostat
4. Join with Daresbury, LBL, DESY, Cornell in 2x7 cell test at Daresbury
5. Participate in determining optimum shape for Main Linac Cavity
6. Development of economical HOM beamline load, damper materials
7. Photo Cathode Material exchange, photo-emission response?, time response? measure the same samples - do the measurements agree?
8. Gun Ceramics + HV coatings, Russian supplier?, can we agree on common parameters (size, etc.), another geometrical design?
9. Laser pulse shaping - deformable mirror, aspheric shaper, etc.
10. Beam diagnostics, exchange plans, 20 m/sec fast wire; high current, non-interceptive ideas
11. Beam dump design (how to dump 1 MW at 10 MeV for KEK design); (Hajima knows of 500 MW dump design)
12. Merger design
13. Exchange of ERL science case



Potential Collaboration Items

- 1. Input Couplers for Injector (are there Japanese companies?)
- 2. Main Linac
- 3. Assembly
- 4. Test Crystals (L-RL)
- 5. (Cryogenic)
- 6. and
- 7. Cornell
- 8. tat

- 9. Laser
- 10. Beam
- 11. Beam
- 12. Mon

CORNELL
LEPP

Summary

- ERL is one of the most promising candidates for future light source.
- ERL project has progressed under the collaboration with KEK, JAEA, ISSP and other facilities.
- To resolve technical & physical challenges, an ERL test facility is under consideration at KEK.
 - To test critical components using ERL beams
 - To generate and accelerate ultra-low emittance beams
 - To investigate accelerator physics issues
- The ERL test facility will consist of a 5-MeV injector, 1-2 cryomodules, a return loop and a beam dump. The energy will be 60 – 200 MeV.
- Design of the test ERL is underway.
- R&D for the DC photocathode gun (at JAEA) and for the SC cavities (at KEK) were started.