

1

Outline of the Accelerators

Two electron storage rings which are the PF-ring and the PF-AR as the dedicated light sources were stably operated at the Photon Factory. The KEK linear accelerator with maximum electron energy of 8 GeV is employed to inject electron beam into the rings. The full energy injection of 2.5 GeV is carried out at the PF-ring, while it is required to increase from the injection energy of 3 GeV to the operation energy of 6.5 GeV at the PF-AR.

The machine parameters of the rings and the calculated spectral performances are listed in Table 1 and Table 2, respectively. The spectral distributions of synchrotron radiation (SR) from the bending magnets and the insertion devices are shown in Fig. 1.

Table 1: Principal beam parameters of the PF ring and PF-AR.

	PF	PF-AR
Energy	2.5 GeV	6.5 GeV
Natural emittance	34.6 nm rad	293 nm rad
Circumference	187 m	377 m
RF frequency	500.1 MHz	508.6 MHz
Bending radius	8.66 m	23.2 m
Energy loss per turn	0.4 MeV	6.66 MeV
Damping time		
Vertical	7.8 ms	2.5 ms
Longitudinal	3.9 ms	1.2 ms
Natural bunch length	10 mm	18.6 mm
Momentum compaction factor	0.00644	0.0129
Natural chromaticity		
Horizontal	-12.9	-14.3
Vertical	-17.3	-13.1
Stored current	450 mA	60 mA
Number of bunches	252	1
Beam lifetime	20-25 h (at 450 mA)	20-25 h (at 60 mA)

Table 2: Calculated spectral performances of the bend source and all the insertion devices at the PF ring (2.5 GeV, 450 mA) and the PF-AR (6.5 GeV, 60 mA). λ_u : period length, N : number of the periods, L : length of undulator or wiggler, $G_x(G_y)$: minimum vertical (horizontal) gap height, $B_y(B_x)$: maximum vertical (horizontal) magnetic field. Type of magnet, H: hybrid configuration, S.C.: super conducting magnet, $\sigma_x\sigma_y$: horizontal or vertical beam size, $\alpha_x\alpha_y$: horizontal or vertical beam divergence, $K_x(K_y)$: vertical (horizontal) deflection parameter, D : photon flux density (photons/sec/mm²/mrad²/0.1%b.w.), B : brilliance (photons/sec/mm²/mrad²/0.1%b.w.), P_T : total radiated power. Different operating modes of undulator and wiggler are denoted by -U and -W, respectively.

Name	E/I GeV/mA	λ_u cm	N	L m	$G_x(G_y)$ cm	$B_y(B_x)$ T	Type of magnet	σ_x mm	σ_y mm	σ_x mrad	σ_y mrad	$K_f(\kappa)$	$\varepsilon/\varepsilon_c$ keV	D	B	P_T kW
PF		2.5/450														
Bend																
SGU#01	1.2	39	0.5	0.4	0.7	P(NdFeB)	0.6	0.012	0.088	0.029	0.78	4	5.38E+13	3.48E+14		
U#02-1	6	60	3.6	2.8	0.4	H(NdFeB)	0.65	0.042	0.054	0.008	2.3	2.73E+17	1.55E+18	1.07		
U#02-2	16	17	2.72	2.6	0.33(0.33)	P(NdFeB)	0.65	0.042	0.054	0.008	4.93(4.93)	9.53E+15	4.58E+16	0.53		
SGU#03	1.8	26	0.5	0.4	1	P(NdFeB)	0.6	0.012	0.088	0.029	1.68	2.50E+16	5.44E+17	0.82		
MPW#05-W	12	21	2.5	2.64	1.4	H(NdFeB)	0.71	0.045	0.078	0.009	16	5.9	2.22E+15	1.10E+16	8.83	
MPW#13-U	18	13	2.5	2.71	1.5	H(NdFeB)	0.74	0.02	0.094	0.019	2	1.70E+16	1.57E+17	0.06		
VW#14				5	5	S.C.	0.53	0.045	0.128	0.008	20.8	5.42E+13	3.59E+14			
SGU#15	1.76	27	0.5	0.4	0.97	P(NdFeB)	0.6	0.012	0.088	0.029	1.37	4.38E+15	9.44E+16	0.75		
U#16-1 & 16-2	5.6	44	2.5	2.1	0.6(0.38)	P(NdFeB)	0.654	0.042	0.055	0.008	3(2)	1.03E+18	1.82E+17	0.88		
SGU#17	1.6	29	0.5	0.4	0.92	P(NdFeB)	0.6	0.012	0.088	0.029	1.37	7.88E+15	1.71E+17	0.69		
Revolver#19B	7.2	32	3.6	2.8	0.4	H(NdFeB)	0.7	0.045	0.078	0.009	2.7	7.17E+16	3.52E+17	0.63		
EMPW#28-U	16	12	1.92	3(11)		P(NdFeB)	0.53	0.045	0.127	0.008	3(3)	1.55E+16	1.00E+16	0.26		
PF-AR		6.5/60														
Bend																
EMPW#NE1W	16	21	3.36	3(11)	1(0.2)	P(NdFeB)	1.07	1.07	0.268	0.032	15(3)	28(90%)	1.84E+15	2.54E+15	5.52	
U#NE3	4	90	3.6	1	0.8	P(NdFeB)	1.57	0.17	0.312	0.029	3	1.29E+16	7.66E+15	3.708		
U#NW2	4	90	3.6	1	0.8	P(NdFeB)	1.57	0.17	0.312	0.029	3	1.29E+16	7.66E+15	3.708		
U#NW12	4	95	3.8	1	0.8	P(NdFeB)	1.57	0.17	0.312	0.029	3	1.29E+16	7.66E+15	3.912		
U#NW14-36	3.6	79	2.8	1	0.8	P(NdFeB)	1.35	0.14	0.338	0.036	2.8	7.69E+15	6.49E+15	3.12		
U#NW14-20	2	75	1.5	0.8	0.63	P(NdFeB)	0.75	0.07	0.383	0.038	1.17	7.69E+15	6.49E+15	0.936		

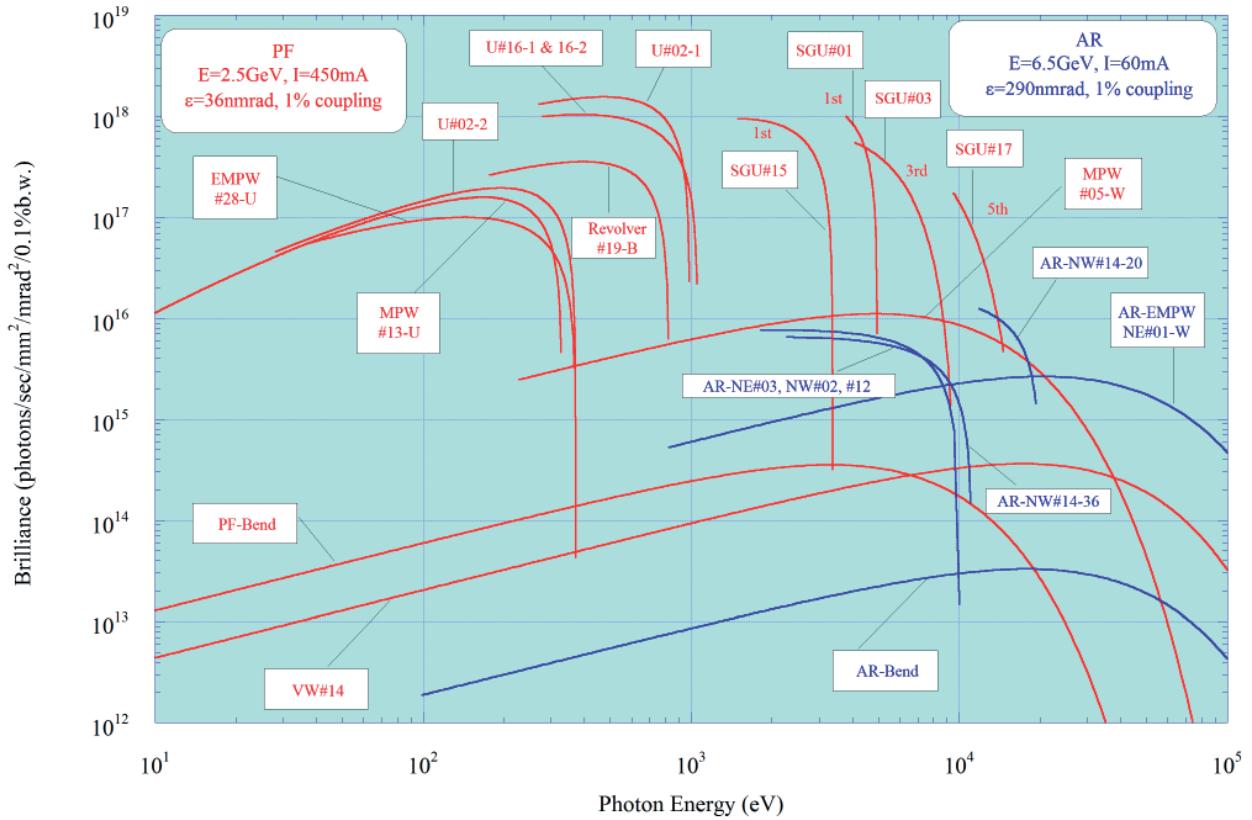


Figure 1: Synchrotron radiation spectra available at the PF Storage Ring (2.5 GeV) and the PF-AR (6.5 GeV). Brilliance of the radiation vs. photon energy are denoted by red curves for the insertion devices, SGU#01, U#02-1 & 02-2, SGU#03, MPW#05, MPW#13, VW#14, SGU#15, U#16-1 & 16-2, SGU#17, Revolver#19-B and EMPW#28, and bending magnets(PF-Bend) at the PF Storage Ring. Blue curves denote those for the insertion devices, EMPW#NE01, U#NE03, U#NW02, U#NW12, U#NW14-36 and U#NW14-20, and the bending magnets (AR-Bend) at the PF-AR. The name of each source is assigned in Table 2. Several insertion devices have both undulator and wiggler modes, which are denoted by U and W, respectively. The spectral curve of each undulator (or undulator mode of multipole wiggler) is a locus of the peak of the first harmonic within the allowance range of K parameter. For SGU#01 and SGU#15, the first harmonic regions are shown. For SGU#03, the third harmonic region is shown. For SGU#17, the fifth harmonic region is shown. Spectra of Revolver#19 for surface B are shown.